

Historic, Archive Document

Do not assume content reflects current scientific knowledge, policies, or practices.

1-9
B5372

THE NEWS LETTER

OF THE

BUREAU OF PUBLIC ROADS

LIBRARY
RECEIVED
★ JAN 10 1927 ★
U.S. DEPT. OF COMMERCE

VOL. 2, NO. 2

DECEMBER, 1926.

CONTENTS

EXTRACTS FROM THE PRESIDENT'S MESSAGE- - - - -	1
NEWS LETTER NOT INTENDED FOR GENERAL DISTRIBUTION- - - - -	2
CONCRETE PAVEMENT DESIGN - - - - -	3
REPORT OF SUB-COMMITTEE ON DESIGN OF THE A.A.S.H.O.- - - - -	10
PROGRESS OF FEDERAL HIGHWAY LEGISLATION - - - - -	21
STATUS OF CURRENT FEDERAL AID ROAD WORK- - - - -	23
STATE HIGHWAY AND BRIDGE BOND STATUS, 1925 - - - - -	24
BUREAU PREPARING AN EXHIBIT FOR THE AMERICAN ROAD BUILDERS ASSOCIATION CONVENTION- - - - -	25
MODULUS OF RUPTURE BY CANTILEVER BEAM TESTS - - - - -	26
MOTOR TRUCK IMPACT TESTS NOW IN PROGRESS - - - - -	27
NUMBERED U.S. HIGHWAYS MAP ADOPTED NOVEMBER 11, 1926 - - - - -	31

EXTRACTS FROM THE PRESIDENT'S MESSAGE

EXTRACTS FROM THE MESSAGE OF PRESIDENT CALVIN C. COOLIDGE
READ TO THE SECOND SESSION OF THE SIXTY-NINTH CONGRESS ON DECEMBER
7, 1926.

* * * * *

"ACTING UPON MY RECOMMENDATION, THE CONGRESS HAS ORDERED THE INTERSTATE COMMERCE COMMISSION TO INVESTIGATE THE FREIGHT-RATE STRUCTURE, DIRECTING THAT SUCH CHANGES SHALL BE MADE IN FREIGHT RATES AS WILL PROMOTE FREEDOM OF MOVEMENT OF AGRICULTURAL PRODUCTS. RAILROAD CONSOLIDATION WHICH I AM ADVOCATING WOULD ALSO RESULT IN A SITUATION WHERE RATES COULD BE MADE MORE ADVANTAGEOUS FOR FARM PRODUCE, AS HAS RECENTLY BEEN DONE IN THE REVISION OF RATES ON FERTILIZERS IN THE SOUTH. ADDITIONAL BENEFIT WILL ACCRUE FROM THE DEVELOPMENT OF OUR INLAND WATERWAYS. THE MISSISSIPPI RIVER SYSTEM CARRIES A COMMERCE OF OVER 50,000,000 TONS AT A SAVING OF NEARLY \$18,000,000 ANNUALLY. THE INLAND WATERWAYS CORPORATION OPERATES BOATS ON 2,500 MILES OF NAVIGABLE STREAMS, AND THROUGH ITS RELATION WITH 165 RAILROADS CARRIES FREIGHT INTO AND OUT OF 45 STATES IN THE UNION. DURING THE PAST SIX MONTHS IT HAS HANDLED OVER 1,000,000 BUSHEL OF GRAIN MONTHLY AND BY ITS LOWER FREIGHT RATES HAS RAISED THE PRICE OF SUCH GRAIN TO THE FARMER PROBABLY $2\frac{1}{3}$ CENTS TO 3 CENTS A BUSHEL. THE HIGHWAY SYSTEM, ON WHICH THE FEDERAL GOVERNMENT EXPENDS ABOUT \$85,000,000 A YEAR, IS OF VITAL IMPORTANCE TO THE RURAL REGIONS."

* * * * *

AMERICAN IDEALS.

"AMERICA IS NOT AND MUST NOT BE A COUNTRY WITHOUT IDEALS. THEY ARE USELESS IF THEY ARE ONLY VISIONARY; THEY ARE ONLY VALUABLE IF THEY ARE PRACTICAL. A NATION CAN NOT DWELL CONSTANTLY ON THE MOUNTAIN TOPS. IT HAS TO BE REPLENISHED AND SUSTAINED THROUGH THE CEASELESS TOIL OF THE LESS INSPIRING VALLEYS. BUT ITS FACE OUGHT ALWAYS TO BE TURNED UPWARD, ITS VISION OUGHT ALWAYS TO BE FIXED ON HIGH.

WE NEED IDEALS THAT CAN BE FOLLOWED IN DAILY LIFE, THAT CAN BE TRANSLATED INTO TERMS OF THE HOME. WE CAN NOT EXPECT TO BE RELIEVED FROM TOIL, BUT WE DO EXPECT TO DIVEST IT OF DEGRADING CONDITIONS. WORK IS HONORABLE; IT IS ENTITLED TO AN HONORABLE RECOMPENSE. WE MUST STRIVE MIGHTILY, BUT HAVING STRIVEN THERE IS A DEFECT IN OUR POLITICAL AND SOCIAL SYSTEM IF WE ARE NOT IN GENERAL REWARDED WITH SUCCESS. TO RELIEVE THE LAND OF THE BURDENS THAT CAME FROM THE WAR, TO RELEASE TO THE INDIVIDUAL MORE OF THE

FRUITS OF HIS OWN INDUSTRY, TO INCREASE HIS EARNING CAPACITY AND DECREASE HIS HOURS OF LABOR, TO ENLARGE THE CIRCLE OF HIS VISION THROUGH GOOD ROADS AND BETTER TRANSPORTATION, TO PLACE BEFORE HIM THE OPPORTUNITY FOR EDUCATION BOTH IN SCIENCE AND IN ART, TO LEAVE HIM FREE TO RECEIVE THE INSPIRATION OF RELIGION, ALL THESE ARE IDEALS WHICH DELIVER HIM FROM THE SERVITUDE OF THE BODY AND EXALT HIM TO THE SERVICE OF THE SOUL. THROUGH THIS EMANCIPATION FROM THE THINGS THAT ARE MATERIAL, WE BROADEN OUR DOMINION OVER THE THINGS THAT ARE SPIRITUAL."

CALVIN COOLIDGE.

NEWS LETTER NOT INTENDED FOR GENERAL DISTRIBUTION

(NOT FOR RELEASE)

RECENTLY REQUESTS HAVE BEEN MADE FOR COPIES OF THE NEWS LETTER BY ORGANIZATIONS AND INDIVIDUALS OUTSIDE OF THE BUREAU. CORRESPONDENCE FROM THE FIELD OFFICES ALSO INDICATES THAT COPIES OF THE NEWS LETTER ARE BEING RELEASED TO THE STATE HIGHWAY DEPARTMENTS AS A SOURCE OF INFORMATION FOR STATE HIGHWAY PERIODICALS. IT WAS NOT INTENDED THAT THE NEWS LETTER SHOULD BE DISTRIBUTED IN THIS MANNER AND IT IS, THEREFORE, BELIEVED ADVISABLE TO RESTATE BRIEFLY JUST WHAT PURPOSE THE NEWS LETTER IS DESIGNED TO FULFILL.

THE NEWS LETTER IS INTENDED PRIMARILY TO DEVELOP UNITY OF PURPOSE AND CONCERTED ACTION IN ALL BRANCHES OF THE BUREAU ORGANIZATION AND TO DISSEMINATE INFORMATION WITHIN THE BUREAU. IT IS AIMED TO ACCOMPLISH THESE OBJECTS BY ARTICLES OR REPRINTS OF SPEECHES WHICH INDICATE THE VIEWPOINT OF THE CHIEF OF THE BUREAU, BY ANNOUNCEMENTS OF RESEARCH PROJECTS, BY DESCRIPTIONS OF THE MOST RECENT INNOVATIONS IN HIGHWAY CONSTRUCTION PRACTICES IN THE SEVERAL STATES, AND BY TABLES AND OTHER DATA WHICH INDICATE THE GENERAL TREND OF HIGHWAY DEVELOPMENT. THE NATURE OF THE INFORMATION IS SUCH THAT THE NEWS LETTER BECOMES A BUREAU ORGAN DESIGNED FOR THE IMMEDIATE INFORMATION OF OUR OWN PERSONNEL.

THE NEWS LETTER CONTAINS MATERIAL WHICH IS SUITABLE FOR GENERAL DISTRIBUTION AND ALSO INFORMATION FURNISHED ONLY FOR THE MEMBERS OF THE BUREAU. IN THE FUTURE THOSE ARTICLES WHICH ARE NOT TO BE DISSEMINATED GENERALLY WILL BE MARKED "NOT FOR RELEASE." THE BALANCE OF THE MATERIAL MAY BE RELEASED AT THE DISCRETION OF THE DISTRICT ENGINEERS. IT IS DESIRED THAT RELEASES FROM THE TEXT SHALL BE GIVEN OUT IN THE FORM OF TYPEWRITTEN COPIES OF THE NEWS LETTER INFORMATION. THE ORIGINAL MIMEOGRAPHED SHEETS OF THE PERIODICAL ARE NOT EXPECTED TO BE RELEASED. IF FOUND MORE PRACTICABLE, APPROVED TABLES, CHARTS OR DIAGRAMS MAY BE SEPARATED FROM THE NEWS LETTER AND GIVEN OUT IN THEIR ORIGINAL FORM.

CONCRETE PAVEMENT DESIGN

CONTRIBUTED BY THE DIVISION OF DESIGN

(~~TEXT~~ NOT FOR RELEASE)

FOR THE PURPOSE OF COMPARING AND STUDYING THE VARIOUS CEMENT CONCRETE PAVEMENT DESIGNS SUBMITTED BY THE STATES FOR FEDERAL-AID ROAD WORK, A TABULATED RECORD OF THE PRINCIPAL FEATURES, BASED ON 1926 PRACTICE, HAS BEEN PREPARED BY THE DIVISION OF DESIGN.

EFFORT WAS MADE TO ELIMINATE, SO FAR AS POSSIBLE, SUCH DESIGNS AS APPEARED TO BE UNUSUAL AND TO SELECT FOR STUDY THE DESIGN MOST REPRESENTATIVE OF THE USUAL PRACTICE IN EACH STATE. CERTAIN STATES HAVE DEVELOPED STANDARD DESIGNS WHICH ARE APPARENTLY USED WITHOUT VARIATION, WHILE OTHER STATES VARY SUCH FEATURES AS DEPTH OF PAVEMENT, MIX, AMOUNT AND POSITION OF STEEL REINFORCEMENT, SPACING OF TRANSVERSE JOINTS AND EVEN THE SHAPE OF THE CROSS SECTION, TO FIT LOCAL CONDITIONS ON EACH PROJECT. IN FOUR STATES SO FEW PROJECTS INVOLVING CONCRETE PAVEMENTS HAVE BEEN RECEIVED THAT NO GENERAL IDEA OF THEIR PRACTICE IN DESIGNING COULD BE OBTAINED.

IN ORDER TO PERMIT QUICK AND EASY COMPARISON OF THE DESIGNS SELECTED AS FAIRLY REPRESENTATIVE OF PRACTICE IN EACH STATE, THE DATA OBTAINED IN THE STUDY HAVE BEEN COMPILED IN THE FORM OF TABLES, WHICH ARE REPRODUCED HEREWITH. ACCOMPANYING THE TABLES IS A SERIES OF SKETCHES OF SOME OF THE UNIQUE AND INTERESTING FEATURES OF DESIGN FOUND IN CERTAIN STATES.

A CASUAL EXAMINATION OF THE TABLES SHOWS THAT THE THICKENED-EDGE SECTION HAS BEEN ADOPTED BY A GREAT MAJORITY OF THE STATES BUT THERE IS LITTLE UNIFORMITY IN THE METHOD OF DEVELOPING THE SECTION. OF THE SEVEN STATES USING THE UNIFORM-THICKNESS DESIGN, IT IS INTERESTING TO NOTE THAT FOUR ARE NEW ENGLAND STATES, THE OTHERS BEING NEW JERSEY, NORTH CAROLINA AND WEST VIRGINIA. THE ENGINEERS IN THE NEW ENGLAND STATES CLAIM THAT THE HARD, ROCKY, SOIL CONDITIONS MAKE IT VERY DIFFICULT TO SHAPE THE SUBGRADE FOR THE THICKENED-EDGE SECTION. THESE STATES ALSO USE GRAVEL SUBBASE UNDER THEIR CONCRETE PAVEMENTS AND CONSIDERABLE REINFORCING STEEL WHICH, THEY CLAIM, ELIMINATES TO A GREAT EXTENT THE NECESSITY FOR A THICKENED EDGE. NORTH CAROLINA USES THE UNIFORM SECTION ONLY IN REINFORCED DESIGN. MARYLAND IS THE ONLY STATE WHICH NOW USES A THIN EDGE, THICKENED-CENTER DESIGN.

THE TABLES SHOW A SURPRISING LACK OF UNIFORMITY IN THE AMOUNT OF CROWN USED IN THE VARIOUS STATES FOR CONCRETE PAVEMENTS. THE AMOUNT OF CROWN ON ALL TYPES OF PAVEMENT HAS BEEN MATERIALLY

UNITED STATES DEPARTMENT OF AGRICULTURE


BUREAU OF PUBLIC ROADS

General features of design of joints in concrete pavements in 1926


State	Longitudinal joint		Transverse joint				Dowels		Special features
	Type	Grade or width, inches	Type	Spacing	Width	Filler	Longitudinal joints	Transverse joints	
Alabama	Not required	Number or inches	Expansion	Foot	Inches	Prepared bituminous	1 1/2-inch diam., 5 ft. c. to c.	None	
Arizona	As shown on plans		do	40	3/8	do	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	do	
Arkansas	do		do	50	1/2	Prepared or poured bit.	None	Two-4 ft. by 1/2-inch diam.	
California	Sketched. See sketch		do	50	1/2 to 3/4	do	4 ft. by 1/2-inch diam., smooth, 5 ft. c. to c.	None	See sketch for longitudinal joint and cross section
Colorado	Deformed metal plate	18	do	60	1/2	Prepared bituminous	4 ft. by 1/2-inch diam., smooth, 5 ft. c. to c.	None	Reinforcing in top on cuts, in bottom on fills
Connecticut	Prepared or poured bituminous	1 1/4	do	40	1/2	Prepared or poured bit.	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	Seven - 4 ft. by 1/2-inch diam., smooth, one end free	Admixture of hydrated lime
Delaware	Deformed metal plate	16	Construction	Necessary	1/4 to 1/2	Prepared or poured bit.	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	None	
Florida	Not required		Expansion	40	1/2 to 3/4	Poured bituminous	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	None	See sketch for thickened transverse joint
Georgia	do		do	Necessary	1/2 to 3/4	Poured bituminous	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	do	
Idaho	Deformed metal plate	14	do	30	1/4 to 1/2	Prepared bituminous	2 ft. by 1/2-inch diam., 21 inches c. to c.	do	
Illinois	do	16	Construction	Necessary			4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	do	
Indiana	do	16	do	do			4 ft. by 5/8-inch diam., deformed, 5 ft. c. to c.	Six - 4 ft. by 1/2-inch diam., smooth, one end free	
Iowa	do	18	do	do			5 ft. by 5/8-inch diam., 4 ft. c. to c.	Nine - 2 ft. by 5/8-inch diam., smooth, one end free	See sketch for cross section.
Kansas	do	18	Expansion	150	3/4	Prepared bituminous	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	None	Tongue and groove construction joint
Kentucky	do	16	do	30	1/2	do	do	do	
Louisiana	do	16	do	50	1/2	Prepared or poured bit.	do	Seven - 4 ft. by 1/2-inch diam., smooth, one end free	Half-width construction required
Maine	Poured bituminous filler	Paint coat	do	40	1/2	Prepared bituminous	2 ft. by 1/2-inch diam., smooth, 3-1/3 ft. c. to c. one end free	do	do
Maryland	Not required		Construction	Necessary			3-1/2 ft. by 1/2-inch diam., smooth, 5 ft. c. to c.	do	See sketch - thin edged section
Massachusetts	Poured bituminous filler	Paint coat	Expansion	60	1/2	Poured bituminous	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	do	Half-width construction and admixture
Michigan	Deformed metal plate	16	do	75 to 100	1	Prepared bituminous	4 ft. by 1/2-inch diam., deformed, 5 ft. c. to c.	Six - 2 1/2 ft. by 1/2-inch diam., smooth, one end free	See sketch of construction joints
Minnesota	do	16	do	201-2/3	2	do	do	do	
Mississippi	do	18	do	50	1/4 to 1/2	Prepared or poured bit.	do	do	
Missouri	do	16	Construction	Necessary			do	do	
Montana	-	-	-	-	-	-	do	do	
Nebraska	Deformed metal plate	18	Construction	Necessary			4 ft. by 1/2-inch diam., 5 ft. c. to c.	None	See sketch of thickened, tongue and groove joint
Nevada	-	-	-	-	-	-	do	do	
New Hampshire	Poured bituminous filler	Paint coat	Expansion	50	1/4 to 3/4	Prepared or poured bit.	do	Eight - 2 ft. by 5/8-inch diam., smooth, one end free	Half-width construction required
New Jersey	Prepared bituminous filler	1/2	do	34-1/3 to 45-1/3	1/2	do	do	Nineteen - 1/2-inch diam., smooth, one end free	Double line of reinforcing
New Mexico	As shown on plans		do	30	1/4 to 1/2	Prepared bituminous	do	do	
New York	Plain butt joint		do	40	1/2	do	do	do	
North Carolina	Not required		Construction	Necessary			do	do	Half-width construction. See sketch of cross section
North Dakota	Deformed metal plate	Not shown	Expansion	30	1/2	Prepared bituminous	5 ft. by 5/8-inch diam.	Eight or nine - 4 ft. by 1/2-inch diam., one end free	See sketch of drop bars at ends
Ohio	do	18	Construction	Necessary			5 ft. by 1/2-inch diam., deformed	do	Heavy crown
Oklahoma	do	18	Expansion	50	1	Poured bituminous	4 ft. by 1/2-inch diam., 5 ft. c. to c.	None	

SPECIAL FEATURES OF CONCRETE PAVEMENT DESIGNS FOR 1926


CALIFORNIA

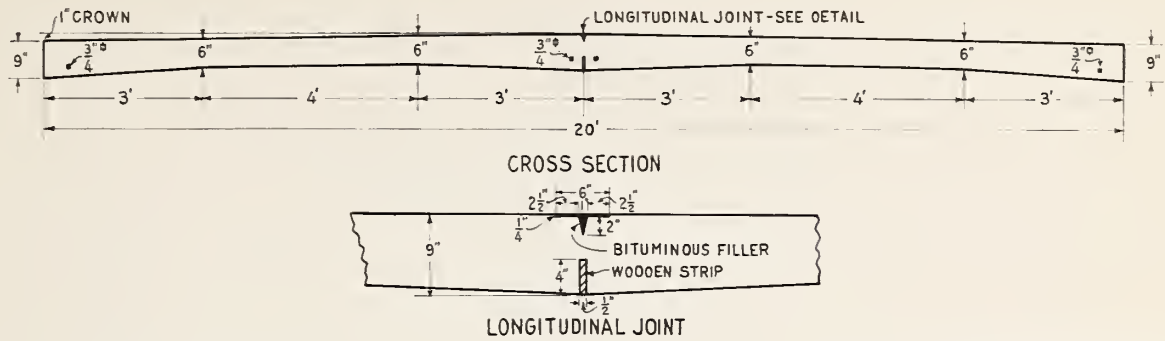


GEORGIA

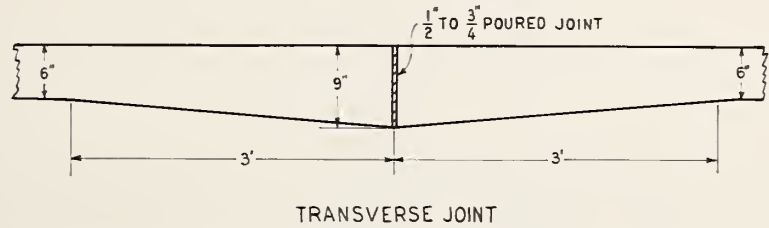


IOWA

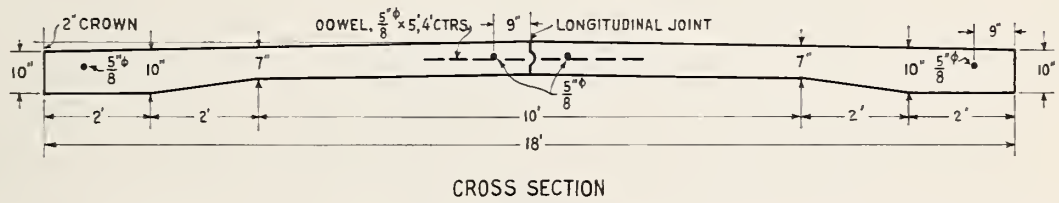

MARYLAND

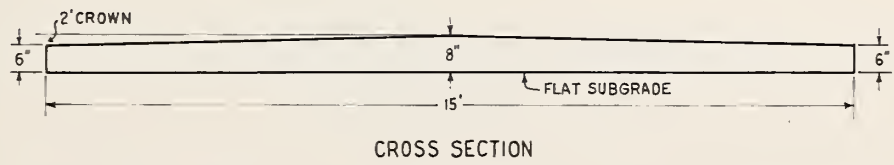


MINNESOTA

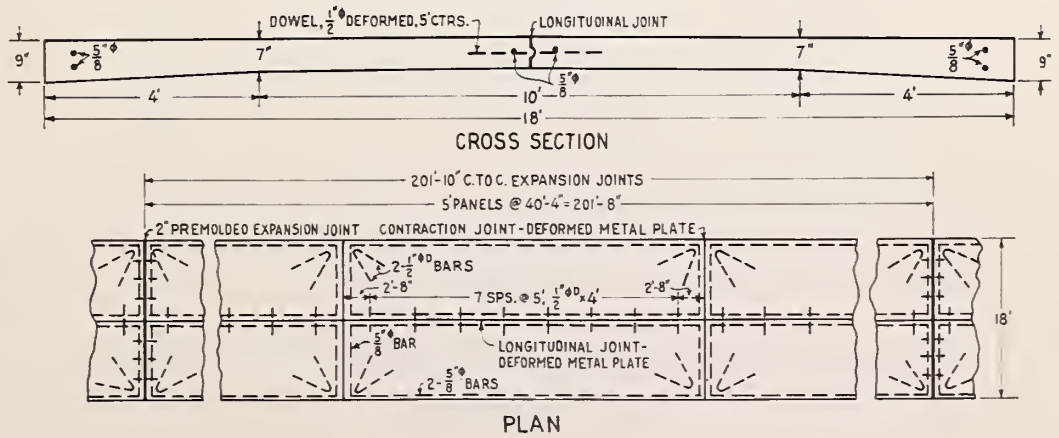


SPECIAL FEATURES OF CONCRETE PAVEMENT DESIGNS FOR 1926

NEBRASKA

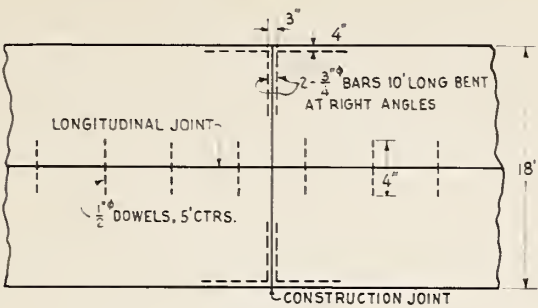


PLAN




DETAIL OF CONSTRUCTION JOINT

NEW YORK




CROSS SECTION

NORTH CAROLINA




CROSS SECTION




DETAIL AT BEGINNING AND ENDING OF PAVEMENT-LONGITUDINAL SECTION

WASHINGTON

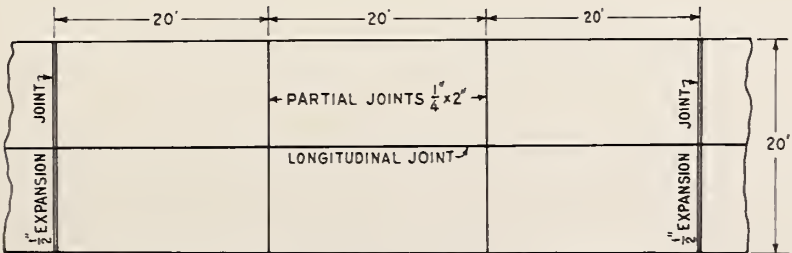

PLAN OF PARTIAL JOINTS



SECTION OF PARTIAL JOINT

REDUCED IN THE PAST TEN YEARS. THE PUBLIC DEMAND FOR SMOOTH-RIDING ROADS AND BETTER APPRECIATION BY ENGINEERS OF THE IMPORTANCE OF IMPACT STRESSES HAS LED TO THE ADOPTION OF RIGID REQUIREMENTS IN FINISHING CONCRETE PAVEMENTS TO SECURE A HIGH DEGREE OF TRUENESS, AND THIS CARE IN FINISHING HAS PERMITTED A REDUCTION IN AMOUNT OF CROWN SO THAT IT IS NOW FEASIBLE TO CONSTRUCT 20-FOOT PAVEMENTS WITH ONLY ONE INCH OF CROWN.

THE GREATEST VARIATION BETWEEN DESIGNS APPEARS TO BE IN THE USE OF TRANSVERSE EXPANSION JOINTS, SOME STATES USING THEM AT 30-FOOT INTERVALS AND SOME STATES OMITTING THEM ENTIRELY. IT WILL BE NOTED THAT THIRTY-THREE STATES USE SOME KIND OF EXPANSION JOINT AND THAT THE MAJORITY OF THEM APPEAR TO FAVOR A SLAB LENGTH OF FROM 40 TO 60 FEET. FURTHER RESEARCH AND OBSERVATION OF PAVEMENTS ALREADY BUILT IS NECESSARY TO DETERMINE WHICH OF THE PRACTICES IS MORE NEARLY CORRECT.

DIFFERENCES IN LOCAL CONDITIONS NO DOUBT JUSTIFY CERTAIN DIFFERENCES IN DESIGN OF CONCRETE PAVEMENTS BUT IT IS BELIEVED THAT GENERAL AGREEMENT WILL EVENTUALLY BE REACHED IN MANY MAJOR FEATURES. MR. SURMAN OF ILLINOIS, IN HIS TALK AT PINEHURST, CRITICISED THE BUREAU FOR APPROVING ANY BUT THE THICKENED-EDGE DESIGN, BUT ENGINEERS FROM OTHER STATES CRITICISE US FOR APPROVING THE ILLINOIS DESIGN WHICH HAS NO EXPANSION JOINT. WE DO NOT BELIEVE THAT ANY ONE STATE HAS DEVELOPED THE ULTIMATE DESIGN FOR CONCRETE PAVEMENTS AND, SINCE IT IS NOT POSSIBLE TO REACH AN AGREEMENT AS TO WHAT CONSTITUTES A CORRECT DESIGN, WE FEEL THAT IT WOULD BE UNWISE AND ARBITRARY FOR THE BUREAU TO INSIST AT THIS TIME THAT ALL STATES CONFORM TO A STANDARD DESIGN.

REPORT OF SUB-COMMITTEE ON DESIGN OF THE A.A.S.H.O.

THE REPORT OF THE SUB-COMMITTEE ON DESIGN OF THE AMERICAN ASSOCIATION OF STATE HIGHWAY OFFICIALS, WHICH WAS RECEIVED AT THE PINEHURST, NORTH CAROLINA, MEETING OF THE ASSOCIATION ON NOVEMBER 8, 1926, CONTAINS MUCH INTERESTING AND INSTRUCTIVE DATA. THE SUB-COMMITTEE HAD AT ITS DISPOSAL THE INFORMATION SECURED DURING THE YEAR FROM THE SEVERAL STATES IN RESPONSE TO ITS QUESTIONNAIRES RELATIVE TO GUARD RAILS, AND AMOUNTS OF WIDENING ON CURVES, SUPERELEVATION, AND CROWN FOR PAVEMENTS. THE SUB-COMMITTEE ADOPTED THE REPORT AND SUBMITTED IT TO THE COMMITTEE ON STANDARDS OF THE ASSOCIATION, WHICH WILL CONSIDER THE REPORT AT THE EARLIEST CONVENIENT OPPORTUNITY. THE REPORT WAS SUBMITTED BY THE CHAIRMAN OF THE SUB-COMMITTEE, MR. C. H. MOOREFIELD, STATE HIGHWAY ENGINEER OF SOUTH CAROLINA.

THE REPORT INCLUDED THE FOLLOWING RECOMMENDATIONS:

GUARD RAILS

1. - THAT THE WOODEN TYPE OF GUARD RAIL, IF USED, BE LIMITED IN HEIGHT SO THAT THE CENTER OF THE TOP BOARD SHALL NOT BE ABOVE THE CENTER OF THE HUB; AND THAT WOODEN RAILS BE NOT LESS THAN 3 INCHES BY 10 INCHES IN CROSS SECTION.

2. - THAT CABLE GUARD RAIL CONSIST OF TWO $3/4$ -INCH CABLES; THE LOWER CABLE TO BE NOT LESS THAN 15 INCHES NOR MORE THAN 18 INCHES ABOVE THE GROUND, AND THE UPPER CABLE NOT LESS THAN 28 NOR MORE THAN 33 INCHES ABOVE THE GROUND.

3. - THAT THE WOVEN-WIRE TYPE OF GUARD RAIL WHEN USED BE 2 FEET IN WIDTH AND PLACED WITH THE TOP APPROXIMATELY 36 INCHES ABOVE THE GROUND.

4. - THAT GUARD-RAIL POSTS BE SPACED NOT EXCEEDING 10 FEET APART AND PREFERABLY NOT EXCEEDING 8 FEET. THAT THE MINIMUM SPACE FROM THE INSIDE EDGE OF THE RAIL TO THE EDGE OF THE SHOULDER OF THE ROAD BE 2 FEET, AND THAT THE MINIMUM DISTANCE FROM THE SAME POINT ON THE RAIL TO THE CENTER OF THE ROAD BE 12 FEET.

WIDENING ON CURVES

1. - THAT THE FORMULA, PROPOSED BY J. T. VOSHELL OF THE BUREAU, BE FOLLOWED IN DETERMINING THE ADDITIONAL WIDTH TO BE USED ON CURVES; AND THAT ALL CURVES WITH A RADIUS OF 1,000 FEET OR LESS BE WIDENED.

$$\text{FORMULA: } W = 2 (R - \sqrt{R^2 - L^2}) + \frac{35}{\sqrt{R}}$$

W = WIDENING IN FEET

R = RADIUS OF CURVE IN FEET

L = WHEEL BASE OF VEHICLES IN FEET (20 FEET RECOMMENDED)

$$2 (R - \sqrt{R^2 - L^2}) = \text{ADDITIONAL WIDTH REQUIRED BY TWO CARS.}$$

SUPERELEVATION

1. - THAT ALL CURVES WITH A RADIUS OF LESS THAN 6,000 FEET BE SUPERELEVATED.

2. - THAT MAXIMUM SUPERELEVATIONS APPROXIMATE 1 INCH PER FOOT OF WIDTH; AND THAT A VELOCITY OF 35 MILES PER HOUR BE USED IN THE FORMULA FOR DETERMINING THE SUPERELEVATION.

$$\text{FORMULA: } E = .067 \frac{V^2}{R}$$

E = SUPERELEVATION IN FEET PER FOOT OF WIDTH

V = VELOCITY IN MILES PER HOUR

R = RADIUS OF CURVE IN FEET

3. - THAT FULL SUPERELEVATION BE USED BETWEEN THE POINT OF CURVATURE AND THE POINT OF TANGENCY OF THE CURVE WITH SUITABLE EASEMENT DISTANCES.

GUARD RAIL

A MARKED CHANGE IN THE TYPE OF GUARD RAILS USED IN THE VARIOUS STATES HAS TAKEN PLACE DURING THE PAST FOUR YEARS. MANY OF THE STATES HAVE DROPPED THE WOODEN STYLE AND ADOPTED THE CABLE OR WOVEN WIRE. A NUMBER OF OTHER STATES ARE GIVING THE CABLE AND WOVEN-WIRE TYPES A TRIAL. PIPE RAILING WHICH WAS USED OCCASIONALLY IN 1922 HAS FALLEN COMPLETELY INTO DISUSE. A NEW COMBINATION CONSISTING OF A BOTTOM WOODEN RAIL AND A TOP CABLE IS NOW BEING USED TO SOME EXTENT BY OHIO AND NEW JERSEY.

THE DIMENSIONS OF THE GUARD RAILS AND THEIR LOCATION VARY CONSIDERABLY IN THE SEVERAL STATES. THE MINIMUM DISTANCE FROM THE EDGE OF THE PAVEMENT TO THE GUARD RAIL VARIES FROM 1 TO 9 FEET. THE AVERAGE DISTANCE IS NOW 43 INCHES. THE AVERAGE HEIGHT OF THE HIGH-TYPE-WOODEN GUARD RAIL IS 39 INCHES AT THE PRESENT TIME; OF THE LOW-TYPE-WOODEN GUARD RAIL, 23 INCHES; OF THE CABLE STYLE, $31\frac{1}{2}$ INCHES; AND OF THE WOVEN-WIRE DESIGN, 36 INCHES. THE CURB GUARD IN COMBINATION WITH GUARD RAIL IS USED BY A FEW STATES ON BRIDGES OR AT EXTREMELY HAZARDOUS POINTS.

OF THE 46 STATES REPORTING IN 1926, 3 REPORTED SERIOUS ACCIDENTS WHICH WERE ATTRIBUTED TO THE HIGH-TYPE-WOODEN GUARD RAIL; 1 TABULATED SUCH AN ACCIDENT FOR THE LOW-WOODEN RAIL STYLE; WHILE NO ACCIDENTS WERE MARKED AGAINST THE CABLE AND WOVEN-WIRE DESIGNS.

A SUMMARY OF THE GUARD RAIL INFORMATION IS SHOWN IN TABLE 1. THE DETAILED DATA FOR THE INDIVIDUAL STATES AS SHOWN IN THE REPORT OF THE SUB-COMMITTEE ARE GIVEN IN TABLE 2.

WIDENING ON CURVES

THE METHODS AND AMOUNT OF WIDENING ON CURVES NOW USED SHOW A WIDE DIVERGENCE IN THE SEVERAL STATES, ALTHOUGH PRACTICALLY EVERY STATE WIDENS PAVEMENTS ON CURVES TO SOME EXTENT. TABLE 3 GIVES THE REPLIES TAKEN FROM THE 1926 QUESTIONNAIRE.

IT HAS BEEN A DIFFICULT MATTER TO CONDENSE THE REPLIES INTO A REASONABLE SPACE AND FOR THIS REASON IT HAS BEEN FOUND DESIRABLE TO OMIT A NUMBER OF INTERESTING COMPUTATIONS AND GRAPHS. TABLE 3 GIVES THE AMOUNT OF WIDENING USED ON DEFINITE DEGREES OF CURVATURE. IN A FEW STATES, HOWEVER, THE AMOUNT OF WIDENING VARIES WITH THE SIZE OF THE CENTRAL ANGLE AS WELL AS WITH THE DEGREE OF CURVE. MOST STATES WIDEN THEIR PAVEMENTS ON THE INSIDE OF THE CURVE, ALTHOUGH SOME WIDEN ON THE INSIDE, OUTSIDE, OR BOTH, DEPENDING UPON LOCAL CONDITIONS.

IT MAY BE SAID IN GENERAL THAT THE AVERAGE AMOUNT OF WIDENING HAS BEEN INCREASED SINCE 1922. THE DECREASE OF THE PREVIOUS MAXIMUM HAS TENDED TOWARD A GREATER UNIFORMITY IN GENERAL PRACTICE. FIGURE 1 ILLUSTRATES APPROXIMATELY THE AVERAGE AMOUNT OF WIDENING USED BY THE STATES REPORTING IN 1926. CURVES ARE ALSO SHOWN WHICH REPRESENT A FEW FORMULAS WHICH HAVE BEEN SUGGESTED FOR DETERMINING THE PROPER AMOUNT OF WIDENING.

SUPERELEVATION ON CURVES

THE AMOUNT OF SUPERELEVATION ON CURVES DEPENDS UPON SEVERAL FACTORS SUCH AS THE RADIUS OF CURVATURE, LENGTH OF CURVE, LENGTH AVAILABLE FOR TRANSITION, WIDTH OF PAVEMENT, SPEED OF VEHICLES, GRADE OF ROAD, AND TYPE OF SURFACING. AS IN THE MATTER OF WIDENING, THERE IS A LARGE VARIATION IN THE PRACTICE OF THE VARIOUS STATES.

TABLE 1. - SUMMARY OF GUARD-RAIL QUESTIONNAIRE FOR 1926

KIND OF GUARD RAIL	YEARS		
	1922	1924	1926
NUMBER OF STATES USING:			
1. - HIGH-TYPE-WOODEN GUARD RAIL			21
2. - LOW-TYPE-WOODEN GUARD RAIL			7
3. - WOODEN GUARD RAIL	45	31	28
4. - CABLE GUARD RAIL	3	17	29
5. - WIRE-MESH GUARD RAIL	0	8	23
6. - WOOD BOTTOM RAIL WITH CABLE TOP RAIL	0	1	2
7. - CURBS IN CONNECTION WITH GUARD RAILS (USED OCCASIONALLY)	5	3	2
NUMBER OF STATES REPORTING ACCIDENTS CAUSED BY:			
1. - HIGH-TYPE-WOODEN GUARD RAIL			3
2. - LOW-TYPE-WOODEN GUARD RAIL			1
3. - CABLE-TYPE GUARD RAIL			0
4. - WOVEN-WIRE-TYPE GUARD RAIL			0
AVERAGE HEIGHT OF GUARD RAILS REPORTED BY STATES:			
1. - HIGH-TYPE-WOODEN GUARD RAIL			33 IN.
2. - LOW-TYPE-WOODEN GUARD RAIL			23 IN.
3. - CABLE-TYPE GUARD RAIL			31 $\frac{1}{2}$ IN.
4. - WOVEN-WIRE-TYPE GUARD RAIL			36 IN.
AVERAGE DISTANCE OF GUARD RAIL FROM EDGE OF PAVEMENT AS REPORTED BY STATES			43 IN.
NUMBER OF STATES REPORTING	47	39	46

Table 2. - Detailed data compiled from the guard-rail questionnaire for 1926

State	Kind of guard rail										Distance to: Curbs				Serious injury:				Remarks
	Wooden		Cable		Woven wire		Other kinds		Height		Edge of pavement		Used		Guard rail				
	Number	Height	Number	Size	Number	Height	Number	Height	Feet	Inches	Feet	Inches	Yes	No	Yes	No			
Alabama.....	-	-	2	3/4	30	-	-	-	-	-	-	24	-	-	-	-	-		
Arizona.....	-	-	2	3/4	30	42	-	-	-	-	-	27	-	-	-	-	-		
Arkansas.....	2	42	2	3/4	39	-	-	-	-	-	-	36	-	-	-	-	-		
California....	1	26	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	Rails set 1 foot inside of shoulder. One-rail type has not caused accidents; 2-rail (old type) has.	
Colorado.....	-	-	2	3/4	30	36	-	-	-	-	-	48	-	-	-	-	-		
Connecticut...	2	42	-	-	-	-	-	-	-	-	-	53	-	-	-	-	-		
Delaware.....	-	-	2	3/4	36	-	-	-	-	-	-	108	-	-	-	-	-		
Florida.....	2	40	-	-	-	36	-	-	-	-	-	36	-	-	-	-	-		
Georgia.....	1	27	2	3/4	30	36	-	-	-	-	-	40	-	-	-	-	-		
Idaho.....	1	34	-	-	-	36	-	-	-	-	-	-	-	-	-	-	-	Wooden guard rail, set 1 foot from shoulder, has pole top rail. 1926 report not received.	
Illinois.....	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Indiana.....	-	-	2	3/4	30	-	-	-	-	-	-	72	-	-	-	-	-		
Iowa.....	-	-	2	3/4	33	-	-	-	-	-	-	48	-	-	-	-	-		
Kansas.....	-	-	2	3/4	33	36	-	-	-	-	-	60	-	-	-	-	-	Curbs used on bridges 3'-6" inside guard rail but not on roadways. 1924 report.	
Kentucky.....	-	-	2	3/4	30	-	-	-	-	-	-	36	-	-	-	-	-		
Louisiana.....	2	36	-	-	-	36	-	-	-	-	-	36	-	-	-	-	-		
Maine.....	2	36	2	3/4	33	34	-	-	-	-	-	24	-	-	-	-	-	Woven wire is wire fencing material.	
Maryland.....	-	-	-	-	-	38	-	-	-	-	-	54	-	-	-	-	-		
Massachusetts.	2	42	-	-	-	-	-	-	-	-	-	36	-	-	-	-	-		
Michigan.....	-	-	2	3/4	27	-	-	-	-	-	-	72	-	-	-	-	-		
Minnesota.....	-	-	1	3/4	24	-	-	-	-	-	-	72	-	-	-	-	-		
Mississippi...	-	-	-	-	-	36	-	-	-	-	-	24	-	-	-	-	-	1924 report. Details of cables and mesh may be incorrect.	
Missouri.....	2	42	2	3/4	30	-	-	-	-	-	-	48	-	-	-	-	-	Placed 1 foot from shoulder.	
Montana.....	1	22	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-		
Nebraska.....	-	-	2	3/4	35	39	-	-	-	-	-	54	-	-	-	-	-		
Nevada.....	1	23	-	-	-	36	-	-	-	-	-	36	-	-	-	-	-	Wooden guard rail has caused accidents. Cable has not.	
New Hampshire.	2	29	2	3/4	32	-	-	-	-	-	-	36	-	-	-	-	-	1924 report. Details of cables and woven wire may be incorrect.	
North Carolina	2	42	2	3/4	32	36	-	-	-	-	-	42	-	-	-	-	-		
North Dakota..	-	-	1	3/4	18	-	-	-	-	-	-	36	-	-	-	-	-	Other kinds include a combination guard rail with bottom rail wood and top a cable.	
Ohio.....	2	34	2	3/4	32	34	-	-	32	-	-	53	-	-	-	-	-		
Oklahoma.....	-	-	2	3/4	30	33	-	-	-	-	-	60	-	-	-	-	-		
Oregon.....	2	36	-	-	-	-	-	-	-	-	-	42	-	-	-	-	-		
Pennsylvania..	-	-	2	3/4	36	-	-	-	-	-	-	42	-	-	-	-	-	In dangerous places top cable is 1-inch diameter.	
Rhode Island..	2	36	-	-	-	-	-	-	-	-	-	42	-	-	-	-	-		
South Carolina	2	26	-	-	32	-	-	-	-	-	-	24	-	-	-	-	-	High-type-wooden guard rail has caused accidents. Curbs used on bridges.	
South Dakota..	-	-	2	3/4	32	36	-	-	-	-	-	36	-	-	-	-	-	Old-wooden-guard-rail type caused accidents. Not used now.	
Tennessee.....	2	42	2	3/4	36	36	-	-	-	-	-	42	-	-	-	-	-		
Texas.....	2	42	2	3/4	36	33	-	-	-	-	-	24	-	-	-	-	-	Wooden, yes. Woven wire, no.	
Utah.....	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	No report.	
Vermont.....	2	42	2	3/4	32	-	-	-	-	-	-	22	-	-	-	-	-		
Virginia.....	2	44	2	3/4	36	38	-	-	-	-	-	36	-	-	-	-	-		
Washington....	2	35	-	-	-	-	-	-	-	-	-	12	-	-	-	-	-		
West Virginia.	-	-	2	3/4	30	36	-	-	-	-	-	54	-	-	-	-	-	Height of woven wire may be incorrect.	
Wisconsin.....	1	18	2	3/4	32	-	-	-	-	-	-	12	-	-	-	-	-	Wooden, yes. Cable, no.	
Wyoming.....	2	39	-	-	-	36	-	-	-	-	-	27	-	-	-	-	-	Wooden, yes. Woven wire, no.	

Table 3. - Detailed data compiled from the curve-widening questionnaire for 1926

State	Additional width required at middle ordinate of curve: Amount at:										Location of widening	Remarks
	D-5	D-10	D-15	D-20	D-25	D-30	D-35	D-40	Point of P.O. to point of zero widening	Distance from P.O. to point of widening		
	R-1146 ft	R-573 ft	R-382 ft	R-287 ft	R-191 ft	R-143 ft	Curvature of zero widening	Per cent	Feet	Feet		
Alabama.....	0	2.00	2.00	2.50	3.00	-	100	100	100	100	Inside	
Arizona.....	1.0	2.00	2.50	2.75	3.00	3.50	100	100	100	100	do	Spiral
Arkansas.....	-	2.00	4.00	5.00	6.00	6.00	50	50	-	-	do	None
California.....	-	-	-	-	-	-	-	-	-	-	-	Approximate
Colorado.....	-	-	3.00	3.25	3.50	4.00	-	-	-	-	Inside	Variable
Connecticut.....	-	-	-	-	-	-	-	-	-	-	-	Spiral
Delaware.....	-	2.00	4.00	5.00	6.00	6.00	50	50	-	-	Inside	Do not widen
Florida.....	-	-	-	-	-	-	-	-	-	-	-	Table
Georgia.....	0	2.50	2.50	3.00	3.50	4.00	100	100	100	100	Inside	Full widening in 150 feet
Idaho.....	-	2.00	3.00	3.50	4.00	4.00	None	None	0	0	Inside or outside	No report
Illinois.....	-	-	-	-	-	-	-	-	-	-	-	Table
Indiana.....	-	2.00	2.50	4.00	5.00	5.00	50	50	60	60	Inside	Extra width for delta = 40° = .0036D - .0225
Iowa.....	-	1.00	1.25	2.00	3.5	5.00	Variable	Variable	Variable	Variable	Inside	See table
Kansas.....	-	2.00	4.00	7.00	7.00	7.00	100	100	50 to 100	50 to 100	-	No report
Kentucky.....	-	-	-	-	-	-	-	-	-	-	-	See table
Louisiana.....	2.4	4.4	6.0	6.0	6.0	6.0	50	50	60 to 180	60 to 180	Inside	See table
Maine.....	-	-	-	-	-	-	-	-	-	-	-	No widening
Maryland.....	3.00	3.00	3.00	3.00	3.00	4.00	-	-	-	-	-	See table
Massachusetts.....	-	3.00	5.00	5.00	5.00	5.00	60 and 80	60 and 80	40 to 120	40 to 120	Inside	B.P.R. method. See table. Spiral
Michigan.....	2.00	2.50	2.75	3.00	3.00	3.00	35	35	60 to 80	60 to 80	do	See table
Minnesota.....	2.00	2.30	3.00	3.70	5.00	5.00	50	50	100	100	do	See table
Mississippi.....	0	2.50	3.00	3.00	3.50	4.00	100	100	100	100	do	do
Missouri.....	-	-	-	-	-	-	-	-	-	-	-	No report
Montana.....	0	2.00	2.50	3.00	3.50	4.00	100	100	70 to 200	70 to 200	Inside	Variable with curve length
Nebraska.....	2.00	4.00	6.00	7.00	8.00	9.00	100	100	100 to 200	100 to 200	do	Variable. See table
Nevada.....	1.00	1.50	2.00	2.50	3.00	3.00	-	-	-	-	do	Variable with delta. Use simple curve
New Hampshire.....	-	2.50	2.50	2.50	3.00	3.50	100	100	100	100	do	See table
New Jersey.....	0	3.00	3.00	3.00	3.00	3.00	50	50	50	50	do	3 feet for curves over 7'
New Mexico.....	-	-	-	-	-	-	-	-	-	-	-	No report
New York.....	-	4.00	5.00	6.00	6.00	6.00	-	-	-	-	Inside	See table
North Carolina.....	-	-	-	-	-	-	-	-	-	-	-	No report
North Dakota.....	-	-	-	-	-	-	-	-	-	-	-	Do not widen
Ohio.....	0	1.25	2.50	3.75	6.25	8.00	67	67	100	100	Inside	See table
Oklahoma.....	0	2.5	5.00	7.50	12.00	12.00	50	50	-	-	do	0.5 ft. per degree of curve over 5'
Oregon.....	0	2.00	2.00	3.00	4.00	4.00	-	-	-	-	-	-
Pennsylvania.....	-	2.00	4.00	5.00	6.00	6.00	50	50	-	-	Inside	Spiral
Rhode Island.....	-	-	-	-	-	-	-	-	-	-	-	No report
South Carolina.....	-	-	-	-	-	-	-	-	-	-	-	None
South Dakota.....	1.5	2.20	3.00	3.70	5.10	-	50	50	50 to 80	50 to 80	Inside	See table
Tennessee.....	-	2.50	2.50	3.00	4.00	5.00	90+	90+	50 to 80	50 to 80	do	do
Texas.....	-	2.50	3.00	3.70	5.00	5.00	50	50	50	50	do	do
Utah.....	-	-	-	-	-	-	-	-	-	-	-	No report
Vermont.....	0	2.00	2.00	2.00	2.00	2.00	100	100	100	100	Inside	All 2 feet extra
Virginia.....	-	-	-	-	-	-	-	-	-	-	-	No report
Washington.....	1.50	2.20	2.50	2.70	3.10	3.40	25	25	50	50	Inside	No report
West Virginia.....	-	-	2.00	2.00	3.00	4.00	100	100	50 to 100	50 to 100	do	W = $\frac{1}{D}$
Wisconsin.....	-	2.00	4.00	5.00	6.00	6.00	50	50	40 to 60	40 to 60	do	See table
Wyoming.....	-	-	-	-	-	-	-	-	-	-	-	do
Average.....	1.82	2.3	3.2	3.9	4.8	5.0	68	68	80	80	27 inside; 1 in- side or outside;	Not shown
Number of States report- ing	9	32	32	33	33	33	31	27	23	23	38	5 States do not widen

R=RADIUS OF CURVE IN FEET. D=DEGREE OF CURVE

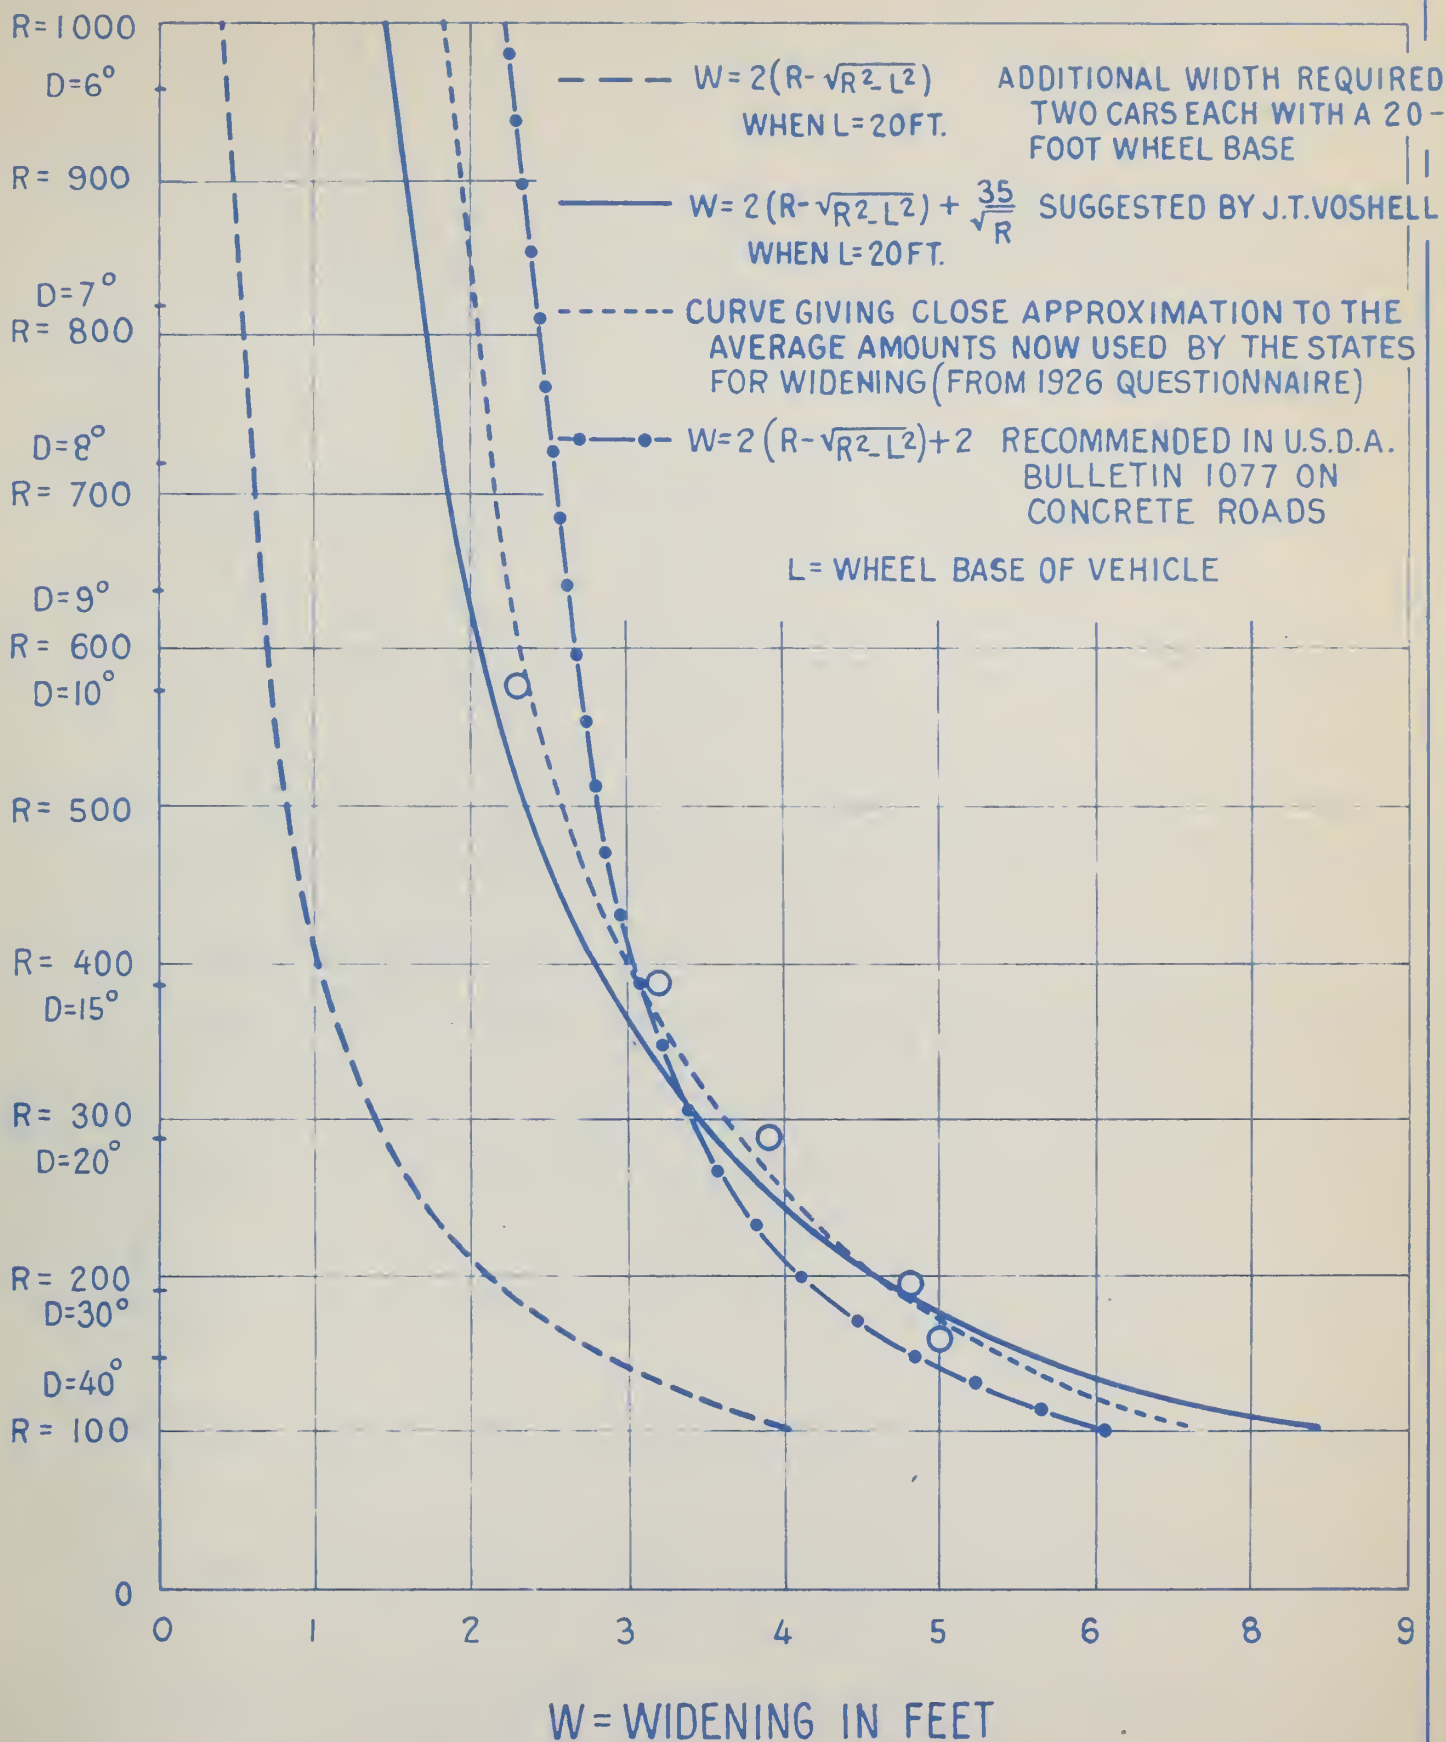


FIGURE 1 - CURVES REPRESENTING THE AMOUNT OF WIDENING REQUIRED ON CURVES

Table 4. - Detailed data compiled from the curve-superelevation questionnaire for 1926

State	Superelevation at middle ordinate of curve						Amount of super-elevation at point of curvature	Transition distance	Fixed base line on pavement	Minimum curvature	Remarks
	D = 50 ft. R = 1146	D = 100 ft. R = 573	D = 150 ft. R = 382	D = 200 ft. R = 287	D = 300 ft. R = 191	D = 400 ft. R = 143					
Alabama	0.625	1.00	1.00	1.00	1.00	1.00	100	150	Inside edge	1	
Arizona	0.62	1.07	1.23	1.41	1.50	1.50	67	100	Inside edge	1	
Arkansas	0.50	0.75	1.00	1.00	1.00	1.00	50	50	Inside edge	6	
California	0.36	0.84	1.08	1.40	1.50	1.50	100	100	Center line	3	$S = \frac{1}{K} (50 - \frac{500}{\Delta E})$
Colorado	-	-	-	-	-	-	-	-	-	-	20 miles per hour
Connecticut	-	-	-	-	-	-	-	-	-	-	Variable
Delaware	0.50	0.75	0.75	1.00	1.00	1.00	50	50+	Inside edge	2 1/2	Begins at point of spiral
Florida	-	-	-	-	-	-	-	-	-	-	Uses bureau standard
Georgia	0.48	0.84	0.96	0.96	0.96	0.96	100	100	Center line	1	Table
Iaho	0.624	1.20	1.24	1.20	1.20	1.20	50	60	do	1	do
Illinois	-	-	-	-	-	-	-	-	-	-	No report
Indiana	0.24	0.43	0.72	0.78	0.78	0.78	67	60	Center line	2	Table
Iowa	0.50	0.50	0.75	0.75	0.75	0.75	100	80 to 125	do	3	Table
Kansas	0.50	0.50	0.75	1.00	1.00	1.00	100	50 to 150	-	5	Table
Kentucky	-	-	-	-	-	-	-	-	-	-	No report
Louisiana	0.30	0.53	0.80	0.90	0.80	0.80	50	60 to 160	-	-	Table
Maine	0.627	1.00	1.00	1.00	1.00	1.00	-	-	-	-	$S = \frac{0.6 V^2}{K}$ inches
Maryland	0.375	0.50	0.75	0.75	0.75	0.75	-	-	-	-	Table
Massachusetts	0.36	0.82	1.00	1.00	1.00	1.00	96	50 to 100	Inside edge	3	Table
Michigan	0.44	0.60	1.00	1.00	1.00	1.00	50	50 to 50	do	1	do
Minnesota	0.53	0.75	0.75	0.75	0.75	0.75	60	50 to 100	Center line	2	do
Mississippi	0.50	0.875	1.00	1.00	1.00	1.00	100	-	Inside edge	1	Table
Missouri	-	-	-	-	-	-	-	-	-	-	No report
Montana	0.50	0.75	0.75	0.75	0.75	0.75	100	70 to 100	Center line	9	Variable with length of curve
Nebraska	0.50	0.75	0.75	0.75	0.75	0.75	93	100 to 100	do	2	Table
Nevada	0.50	0.63	0.71	0.90	0.90	0.90	-	-	Inside edge	3	do
New Hampshire	0.45	0.89	1.00	1.00	1.00	1.00	100	-	Center line	6	do
New Jersey	0.33	0.63	0.63	0.58	0.58	0.58	50	50	do	5	do
New Mexico	-	-	-	-	-	-	-	-	-	-	Table
New York	0.75	1.25	1.37	1.50	1.50	1.50	-	-	Center line	3 1/2	Table
North Carolina	-	-	-	-	-	-	-	-	-	-	No report
North Dakota	0.67	0.87	1.00	1.00	1.00	1.00	100	100	-	-	Table
Ohio	0.65	0.81	0.90	0.98	1.25	1.25	67	100	Center line	1	Table 701.9347
Oklahoma	0.43	0.53	1.00	1.20	1.20	1.20	50	-	do	4	$S = \frac{701.9347}{K}$
Oregon	0.72	1.02	1.20	1.32	1.44	1.57	-	-	-	1	$S = \frac{0.67 V^2}{K}$
Pennsylvania	0.50	0.75	0.75	1.00	1.00	1.00	50	50	-	-	Begins at point of spiral
Rhode Island	-	-	-	-	-	-	-	150	-	4	No tables
South Carolina	0.525	0.875	0.875	0.875	0.875	0.875	100	-	-	1	Transition at curve 1 1925
South Dakota	0.51	0.82	0.84	0.85	0.91	0.91	50	50	-	-	Table
Tennessee	0.375	0.75	1.00	1.00	1.00	1.00	100	100 to 150	Center line	1	do
Texas	-	0.75	1.00	1.00	1.25	1.25	50	50	do	3	do
Vermont	0.55	-	0.73	0.73	0.73	0.73	100	-	-	4	No report
Virginia	-	-	-	-	-	-	-	-	-	-	No report
Washington	0.72	0.84	0.96	1.08	1.20	1.20	63	75	Center line	3 1/2	Table
West Virginia	0.50	0.87	1.00	1.125	1.125	1.125	100	50 to 100	do	1	do
Wisconsin	0.50	0.75	0.75	0.75	0.75	0.75	100	150	do	1	do
Wyoming	0.63	1.00	1.00	1.00	1.00	1.00	100	60	do	1	do
Average of states	0.513	0.791	0.915	0.98	1.01	1.02	79	94	-	-	-
Number of states reported	35	37	37	37	37	37	37	31	-	-	-

TABLE 4 GIVES THE ANSWERS TO THE 1926 QUESTIONNAIRE AS TABULATED BY THE SUB-COMMITTEE. SUPERELEVATION IS NOW USED ON 1-DEGREE CURVES BY AT LEAST 9 STATES. MANY STATES, HOWEVER, DO NOT SUPERELEVATE CURVES WITH A RADIUS OF MORE THAN 1,500 FEET. THE AVERAGE MAXIMUM SUPERELEVATION IS 1.02 INCHES PER FOOT OF WIDTH, ALTHOUGH THERE ARE SEVERAL STATES USING A MAXIMUM OF 1.5 INCHES PER FOOT OF WIDTH. DUE TO THE WIDE VARIATIONS IN THE PREVAILING FORMULAS, IT WAS FOUND MOST CONVENIENT TO TABULATE THE SUPERELEVATION FOR DEFINITE DEGREES OF CURVATURE. A BRIEF SUMMARY OF THE TABLE SHOWS THE AVERAGE SUPERELEVATION FOR A 5-DEGREE CURVE TO BE 0.513 INCH PER FOOT OF WIDTH; FOR A 10-DEGREE CURVE, 0.791 INCH; FOR A 15-DEGREE CURVE, 0.915 INCH; FOR A 20-DEGREE CURVE, 0.98 INCH; FOR A 30-DEGREE CURVE, 1.01 INCHES; AND FOR A 40-DEGREE CURVE, 1.02 INCHES. THE SUPERELEVATION BEGINS AT AN AVERAGE DISTANCE OF 94 FEET FROM THE POINT OF CURVATURE AND REACHES AN AVERAGE OF 73 PER CENT OF THE FULL VALUE AT THE POINT OF CURVATURE. THERE IS A GREAT DIFFERENCE IN THE METHODS OF TRANSITION. MANY STATES USE THE FULL SUPERELEVATION AT THE POINT OF CURVATURE AND POINT OF TANGENCY WITH AN EASEMENT OF 100 TO 150 FEET. OTHER STATES USE ONLY 50 PER CENT OF THE FULL SUPERELEVATION AT THE POINT OF CURVATURE WITH AN EASEMENT DISTANCE EXTENDING FROM 50 TO 75 FEET BOTH WAYS FROM THIS POINT.

COMPENSATION OF GRADES FOR CURVATURE

ONLY 8 STATES REPORTED ANY COMPENSATION FOR GRADES ON CURVES. IN MOST CASES THE AMOUNT OF COMPENSATION, WHERE USED, IS DETERMINED BY THE LENGTH AND RADIUS OF THE CURVE AND SUCH LOCAL RESTRICTIONS AS SIGHT, DISTANCE AND COST. TABLE 5 SHOWS THE RESULTS OF THE 1926 QUESTIONNAIRE AS AVERAGED BY THE SUB-COMMITTEE.

CALIFORNIA COMPENSATES FOR ALL GRADES OF 6 PER CENT OR MORE. TENNESSEE MAKES A REDUCTION IN GRADE OF 1 PER CENT FOR EACH 50-FOOT REDUCTION IN RADIUS BELOW 200 FEET. OREGON LIMITS THE GRADE TO 4 PER CENT ON CURVES OF OVER 28 DEGREES.

PAVEMENT CROWNS

THE CROWNS FOR ALL TYPES OF HARD-SURFACE ROADS ARE ABOUT THE SAME FOR A GIVEN WIDTH ACCORDING TO THE ANSWERS RECEIVED FROM THE 1926 QUESTIONNAIRE AS BRIEFED IN TABLE 5. A FEW STATES STILL USE A GREATER CROWN FOR BITUMINOUS ROADS THAN FOR THE CEMENT CONCRETE TYPE.

Table 5. - Detailed data compiled from the 1925 questionnaire relative to compensation of grades for curvature and the amount of crown for paved roads

State	Compensation of grades for curvature		Amount of crown for paved roads			Remarks
	Yes	No	18 feet: 20 feet: 24 feet:		Other widths:	
			Inches:	Inches:		
Alabama	-	X	2.00	2.25	2.75	-
Arizona	-	X	1.125	1.25	1.50	-
Arkansas	-	X	1.50	-	-	-
California	X	-	-	1.00	1.25	30
Colorado	X	-	1.50	-	-	1.5
Connecticut	-	X	2.25	2.50	3.00	-
Delaware	-	X	2.00	2.00	2.00	-
Florida	-	X	2.25	3.00	4.875	-
Georgia	-	X	1.50	1.75	2.00	-
Idaho	-	X	1.50	-	-	-
Illinois	-	X	-	-	-	-
Indiana	-	X	2.00	2.00	-	-
Iowa	-	X	2.00	-	-	-
Kansas	-	X	2.00	-	-	-
Kentucky	-	X	2.25	2.50	3.00	-
Louisiana	-	X	2.00	2.50	3.00	-
Maine	-	X	1.25	1.50	-	-
Maryland	-	X	2.00	2.00	-	-
Massachusetts	-	X	2.25	2.50	3.00	-
Michigan	-	X	1.75	2.00	3.00	-
Minnesota	-	X	1.00	1.00	1.50	27
Missouri	-	X	2.00	-	-	-
Montana	-	X	1.50	-	-	-
Nebraska	-	X	2.00	2.75	3.25	-
Nevada	-	X	1.25	-	-	-
New Hampshire	-	X	2.25	2.50	3.00	-
New Jersey	-	X	-	1.50	-	-
New Mexico	-	X	-	-	-	-
New York	-	X	1.125	1.25	-	-
North Carolina	-	X	2.00	-	-	-
North Dakota	-	X	1.00	1.125	-	-
Ohio	-	X	1.75	2.00	-	-
Oklahoma	-	X	2.00	-	-	-
Oregon	X	-	-	-	-	-
Pennsylvania	-	X	1.50	1.50	-	-
Rhode Island	-	X	2.00	2.50	3.00	-
South Carolina	-	X	2.0	-	-	-
South Dakota	-	X	2.00	-	-	-
Texas	-	X	2.00	2.50	3.00	-
Vermont	-	X	2.00	2.50	3.00	-
Virginia	X	-	2.25	2.50	3.00	-
Washington	-	X	1.50	1.50	1.50	-
West Virginia	-	X	1.25	1.50	2.00	-
Wisconsin	-	X	2.25	2.50	3.00	-
Wyoming	-	X	2.00	2.50	3.00	-
Average	8	33	1.750	1.89	2.482	-
Grand Total	45	33	45	33	33	-



A COMPARISON OF THE 1926 TABULATION WITH THOSE MADE IN 1922 AND 1924 SHOWS A SLIGHT TENDENCY TO REDUCE THE HEIGHT OF CROWN. IN 1922 THE AVERAGE CROWN OF AN 18-FOOT CONCRETE ROAD WAS 1.88 INCHES; IN 1924, 1.77 INCHES; AND IN 1926, 1.753 INCHES. THE AVERAGE CROWN OF A 20-FOOT PAVEMENT IN 1926 IS 1.89 INCHES, AND THAT OF A 24-FOOT PAVEMENT IS 2.482 INCHES.

The first of these is the fact that the population of the United States has increased from 3,900,000 in 1790 to 62,000,000 in 1900. This increase has been the result of a number of causes, the most important of which are the immigration of foreign-born persons and the increase in the birth rate. The second fact is that the population of the United States has become more concentrated in the eastern half of the country. In 1790, only 2,000,000 of the population lived in the eastern half of the country, while in 1900, 45,000,000 lived there. This concentration has been the result of a number of causes, the most important of which are the immigration of foreign-born persons and the increase in the birth rate. The third fact is that the population of the United States has become more concentrated in the cities. In 1790, only 1,000,000 of the population lived in cities, while in 1900, 35,000,000 lived there. This concentration has been the result of a number of causes, the most important of which are the immigration of foreign-born persons and the increase in the birth rate.

PROGRESS OF FEDERAL HIGHWAY LEGISLATION

H. R. 14254 - INTRODUCED IN THE HOUSE ON DECEMBER 7, 1926, BY C. C. DOWELL OF IOWA, AND REFERRED TO THE COMMITTEE ON ROADS.

PROVIDES FOR AN AMENDMENT TO EXISTING FEDERAL-AID ROAD LEGISLATION PREVENTING THE USE OF THE UNITED STATES SHIELD FOR ANY PURPOSE OTHER THAN AS A MARKER FOR UNITED STATES HIGHWAYS.

H. R. 14565 - INTRODUCED IN THE HOUSE ON DECEMBER 8, 1926, BY SCOTT LEAVITT OF MONTANA AND REFERRED TO THE COMMITTEE ON ROADS.

PROVIDES THAT THE WORDING OF THE FEDERAL HIGHWAY ACT OF 1921 BE REVISED SO AS TO READ THAT "BEFORE ANY PROJECTS ARE APPROVED IN ANY STATE, SUCH STATE THROUGH ITS STATE HIGHWAY DEPARTMENT, SHALL SELECT OR DESIGNATE A SYSTEM OF HIGHWAYS NOT TO EXCEED 7 PER CENTUM OF THE TOTAL HIGHWAY MILEAGE OF SUCH STATE AS SHOWN BY THE RECORDS OF THE STATE HIGHWAY DEPARTMENT ON DECEMBER 31, 1926."

H. R. 14828 - INTRODUCED IN THE HOUSE ON DECEMBER 10, 1926, BY S. S. ARENTZ OF NEVADA, AND REFERRED TO THE COMMITTEE ON ROADS.

FIRST, PROVIDES FOR AN AMENDMENT TO EXISTING FEDERAL-AID ROAD LEGISLATION PREVENTING THE USE OF THE UNITED STATES SHIELD FOR ANY PURPOSE OTHER THAN AS A MARKER FOR UNITED STATES HIGHWAYS.

SECOND, PROVIDES THAT THE PARAGRAPH OF THE FEDERAL HIGHWAY ACT OF 1921 BE REPEALED, WHICH PROHIBITS THE USE OF MORE THAN 60 PER CENT OF THE FEDERAL AID ALLOTTED TO ANY STATE ON THE PRIMARY OR INTERSTATE HIGHWAYS UNTIL PROVISION HAS BEEN MADE FOR THE IMPROVEMENT OF THE ENTIRE SYSTEM.

H. R. 1429 - INTRODUCED IN THE HOUSE ON DECEMBER 11, 1926, BY W. F. STEVENSON OF SOUTH CAROLINA AND REFERRED TO THE COMMITTEE ON ROADS.

THE HISTORY OF THE UNITED STATES

CHAPTER I. THE DISCOVERY OF AMERICA.

THE first discovery of America was made by Christopher Columbus in 1492. He sailed from Spain in search of a westward route to the Indies, and on October 12th he landed on the island of San Salvador in the West Indies.

His voyage was a great success, and he returned to Spain with a large amount of gold and silver, and many valuable specimens of the natural history of the new world.

His discovery opened up a new era of exploration and discovery, and led to the establishment of a great empire in the New World. The Spanish government, under the leadership of Isabella and Ferdinand, sent many expeditions to explore the new world, and to establish colonies.

The first of these colonies was established in 1493, on the island of Hispaniola. It was named San Cristobal, and was the first permanent European settlement in the New World.

Other colonies were established in 1494, 1495, and 1496, on the islands of Cuba, Puerto Rico, and Santo Domingo. These colonies were the first permanent European settlements in the New World.

The Spanish government, under the leadership of Isabella and Ferdinand, sent many expeditions to explore the new world, and to establish colonies. The first of these colonies was established in 1493, on the island of Hispaniola. It was named San Cristobal, and was the first permanent European settlement in the New World.

Other colonies were established in 1494, 1495, and 1496, on the islands of Cuba, Puerto Rico, and Santo Domingo. These colonies were the first permanent European settlements in the New World.

PROVIDES THAT 20 PER CENT OF THE FEDERAL-AID ROAD FUNDS ALLOTTED TO SOUTH CAROLINA BE USED FOR THE REPAIR AND MAINTENANCE OF POST ROADS WHICH ARE NOT MAIN OR INTERSTATE HIGHWAYS.

H. R. 15008 - THE AGRICULTURAL APPROPRIATION BILL. INTRODUCED IN THE HOUSE ON DECEMBER 13, 1926, BY W. W. MAGEE OF NEW YORK.

PROVIDES FOR AN APPROPRIATION FOR FOREST ROADS AND TRAILS OF \$6,500,000. OF THIS AMOUNT \$275,000 IS A PART OF THE AUTHORIZATION FOR THE FISCAL YEAR 1928, AND THE BALANCE IS FROM THE AUTHORIZATION FOR THE FISCAL YEAR 1927.

PROVIDES FOR AN APPROPRIATION FOR FEDERAL-AID ROADS OF \$71,000,000. OF THIS AMOUNT \$23,800,000 IS THE REMAINDER OF THE \$75,000,000 AUTHORIZED FOR THE FISCAL YEAR ENDING JUNE 30, 1926 AND THE BALANCE IS FROM THE AUTHORIZATION FOR THE FISCAL YEAR 1927.

S. 4602 - INTRODUCED IN THE SENATE ON DECEMBER 7, 1926, BY T. L. ODDIE OF NEVADA AND REFERRED TO THE COMMITTEE ON POST OFFICES AND POST ROADS.

CONTAINS PROVISIONS IDENTICAL WITH THOSE IN H. R. 14828.

S. 4675 - INTRODUCED IN THE SENATE ON DECEMBER 9, 1926, BY C. DU PONT OF DELAWARE AND REFERRED TO THE COMMITTEE ON POST OFFICES AND POST ROADS.

PROVIDES FOR THE CONSTRUCTION OF A POST ROAD AND MILITARY HIGHWAY FROM A POINT ON OR NEAR THE ATLANTIC COAST TO A POINT ON OR NEAR THE PACIFIC COAST.

UNITED STATES DEPARTMENT OF AGRICULTURE
BUREAU OF PUBLIC ROADS

STATUS OF CURRENT FEDERAL AID ROAD WORK

FOR THE FISCAL YEAR ENDING JUNE 30, 1927

AS OF NOVEMBER 30, 1926

STATES	BALANCE OF FEDERAL AID FUNDS AVAILABLE FOR NEW PROJECTS	* UNDER CONSTRUCTION				APPROVED FOR CONSTRUCTION				AMOUNT PAID STATES DURING FISCAL YEAR	COMPLETED AND PAID DURING FISCAL YEAR				AGREEMENTS NOW IN FORCE				P. 6-1 E. RECOMMENDED FOR APPROVAL BY DISTRICT ENGINEER				STATES
		FEDERAL AID		MILES		FEDERAL AID		MILES			FEDERAL AID		MILES		FEDERAL AID		MILES		FEDERAL AID		MILES		
		ORIGINAL	STAGE	ORIGINAL	STAGE	ORIGINAL	STAGE	ORIGINAL	STAGE		ORIGINAL	STAGE	ORIGINAL	STAGE	ORIGINAL	STAGE	ORIGINAL	STAGE	ORIGINAL	STAGE			
ALABAMA	\$ 2,168,260.31	\$ 2,744,634.98	270.0	4-8	\$ 70,308.93	13-4	\$ 445,290.28	\$ 639,665.69	100.5	\$ 2,375,027.26	217.6	4-8	\$ 440,516.65	55.9	ALABAMA								
ARIZONA	2,483,926.76	1,097,546.16	85.0				149,399.74	172,004.74	26.7	995,598.25	80.7		101,947.30	4.3	ARIZONA								
ARKANSAS	753,631.78	1,991,172.27	272.9		741,335.08	94.3	567,248.30	452,766.52	74.3	2,009,241.54	282.6		723,265.81	94.6	ARKANSAS								
CALIFORNIA	2,337,930.12	5,131,322.61	245.2	17-7	1,27,556.21	7-1	1,425,777.92	1,471,835.96	105.7	4,916,907.68	235.8	17-7	342,579.04	16.7	CALIFORNIA								
COLORADO	1,700,626.19	2,716,073.46	259.9	9-2	299,416.03	30-2	269,448.97	607,654.14	32.0	2,221,423.90	205.9	9-2	794,055.69	93.1	COLORADO								
CONNECTICUT	406,879.07	1,585,625.34	73.0		86,791.17	3-1		153,899.62	9.0	1,279,760.55	63.1		332,555.96	13.0	CONNECTICUT								
DELAWARE	12,427.21	373,034.05	25.4				171,513.48	306,931.14	17.6	301,328.60	17.9		11,705.55	7-5	DELAWARE								
FLORIDA	1,153,709.39	4,048,953.64	227.3	24-8	28,095.00	1-9	694,471.40	1,049,833.65	62.6	3,786,625.05	227.3	11-8	271,523.59	1-9	FLORIDA								
GEORGIA	3,159,885.91	5,631,497.69	496.3	130-1	15,948.05	7-6	1,163,832.37	1,183,209.73	165.5	5,238,974.81	497.6	108-0	308,360.83	6-3	GEORGIA								
ILLINOIS	212,181.92	1,473,377.82	173.0	15-5	272,433.27	39-3	733,415.04	719,535.29	62.2	1,244,929.81	143.0	6-4	500,897.28	69.3	ILLINOIS								
INDIANA	3,159,885.91	4,639,673.48	345.7		432,782.21	32-6	211,371.43	980,960.56	69.1	4,096,282.94	301.5	11-6	363,707.63	22.5	INDIANA								
IOWA	272,728.26	8,223,978.57	502.5	11-6	547,338.35	74-7	1,339,315.62	1,587,437.09	200.7	7,860,170.94	480.0	11-6	139,597.94	35.9	IOWA								
KANSAS	218,817.11	5,590,237.15	781.8	4-1	939,368.54	13-0	965,198.86	235,998.35	48.9	5,315,796.75	147.9	4-9	1,103,408.94	146.7	KANSAS								
KENTUCKY	180,561.68	3,586,433.98	383.2	48-7	656,264.03	62-6	584,332.72	297,543.46	13-3	3,543,989.30	379.6	48-7	639,709.31	67.2	KENTUCKY								
LOUISIANA	364,715.03	1,764,604.86	186.1		640,863.33	42-1	524,251.99	387,478.39	31.9	1,567,231.03	179.0		409,243.56	48-2	LOUISIANA								
MAINE	728,935.37	912,095.53	70.7		402,821.22	33-2	221,255.09	95,622.31	14-8	1,314,916.75	103.9		19,260.00	1-3	MAINE								
MARYLAND	10,371.19	716,072.29	73.8				121,945.75	121,945.75	5-1	1,495,098.42	72.3		57,266.80	2-5	MARYLAND								
MASSACHUSETTS	1,777,160.71	1,319,576.75	68.5		232,778.17	14-2	74,025.25	189,177.04	13-6	6,318,983.62	398.5	34-9	512,772.50	30-3	MASSACHUSETTS								
MICHIGAN	1,494,839.54	6,567,269.62	413.2	34-9	274,496.50	15-6	1,709,865.05	189,177.04	13-6	1,785,600.00	249.4	68-8	79,000.00	130-7	MICHIGAN								
MINNESOTA	41,634.33	1,823,600.00	270.5	68-8	41,000.00	108-6	2,220,925.30	2,099,429.11	365.2	1,186,680.00	249.4	68-8	79,000.00	130-7	MINNESOTA								
MISSISSIPPI	292,667.25	3,698,760.24	377.7		159,317.61	34-9	686,464.41	563,148.80	71-7	3,179,982.95	333.9		477,704.50	73-7	MISSISSIPPI								
MISSOURI	167,724.84	6,060,546.97	408.6	41-1	143,422.14	5-0	2,102,561.65	2,678,728.20	198.6	5,135,877.79	393.3	45-7	468,050.32	20-3	MISSOURI								
MONTANA	4,420,172.67	1,732,168.93	172.2	8-2	429,567.89	87-3	607,192.31	509,109.72	59.1	2,103,313.99	250.5	9-2	59,822.73	9-0	MONTANA								
NEBRASKA	1,601,551.88	6,486,768.49	132.0	32-4	248,364.84	55-5	1,331,326.80	823,767.27	183-0	6,394,288.48	138.7	70-3	341,434.85	58-8	NEBRASKA								
NEVADA	324,494.86	1,764,770.48	239.9				417,963.91	1,575,015.07	183-2	1,537,107.36	223.1	32-2	227,653.12	16-8	NEVADA								
NEW HAMPSHIRE	85,795.87	705,246.06	45.0				66,112.13			690,490.37	43.8		14,755.69	1-2	NEW HAMPSHIRE								
NEW JERSEY	110,163.94	2,726,328.56	47.2		223,605.00	14-9	257,411.15	308,990.29	18.1	2,907,168.56	59.2		42,765.00	2-9	NEW JERSEY								
NEW MEXICO	1,444,107.81	1,994,922.87	249.9		185,582.18	9-9	15,576.40	8,115.76	0-1	1,893,110.90	223.1		287,394.15	36-7	NEW MEXICO								
NEW YORK	3,624,763.14	9,808,282.70	620.8		1,865,647.50	103-3	2,287,286.53	934,544.47	68.1	11,347,137.70	712.9		326,792.50	11-2	NEW YORK								
NORTH CAROLINA	1,234.58	2,206,892.72	143.6		408,442.59	34-4	1,213,863.70	1,923,239.17	102.8	1,944,242.97	122.4		671,092.34	55-6	NORTH CAROLINA								
NORTH DAKOTA	140,395.29	3,438,174.18	538.4	167-5	256,341.82	79-1	1,567,320.82	891,287.93	222.4	3,404,661.32	918.0	204-7	290,454.69	99-5	NORTH DAKOTA								
OHIO	1,762,465.31	4,972,202.19	381.4	17-8	561,020.00	17-9	1,604,562.24	1,064,321.47	94.1	4,844,581.34	367.1	17-6	689,640.85	32-2	OHIO								
OKLAHOMA	399,708.88	1,104,032.58	102.0	10-0	966,390.24	146-5	597,060.69	439,056.35	41-7	1,618,510.45	210.3	15-6	442,512.37	39-2	OKLAHOMA								
OREGON	101,734.43	1,774,756.86	128.0	16-6	6,000.00	7-0	519,057.93	403,640.92	23-7	1,691,466.28	114.8	16-6	89,300.58	20-2	OREGON								
PENNSYLVANIA	286,788.42	8,626,177.50	597.2		917,194.42	59-0	1,121,338.92	47,888.62	3-2	9,599,688.90	605.1		954,693.02	51-1	PENNSYLVANIA								
RHODE ISLAND	418,934.94	326,136.00	21.8		260,155.00	16-6	333,747.28	113,520.00	7-6	514,276.00	34.3		62,010.00	4-1	RHODE ISLAND								
SOUTH CAROLINA	46,792.96	2,491,292.35	194.5	14-7	42,381.88	10-3	611,379.41	454,194.28	58-0	2,409,292.35	186.2	14-7	124,921.59	13-6	SOUTH CAROLINA								
SOUTH DAKOTA	135,854.15	1,818,341.39	643.0	78-6	30,539.05	13-0	783,624.97	517,228.44	177.9	1,835,603.37	639.5	78-6	73,277.07	15-5	SOUTH DAKOTA								
TENNESSEE	298,914.63	3,817,387.29	236.0	58-0	120,519.04	35-0	1,256,445.35	567,186.82	44.4	3,687,088.35	223.8	58-0	450,816.98	47-2	TENNESSEE								
TEXAS	2,049,647.28	7,572,699.69	721.1	128-6	1,884,130.93	125-9	2,076,409.14	1,660,438.49	247.3	7,971,441.59	725.4	168-1	1,485,448.93	122-6	TEXAS								
UTAH	569,978.80	1,354,767.12	166.0		506,111.44	44-9	299,153.86	293,480.96	29.4	1,354,767.12	166.0		502,111.44	44-9	UTAH								
VERMONT	352,224.07	866,003.69	41.1		28,646.23	11-1	367,968.47	38,579.83	2-0	813,334.84	38.1		46,068.75	3-0	VERMONT								
VIRGINIA	8,962.56	2,639,832.71	166.9		25,000.00	4-6	1,210,078.10	38,579.83	39-8	2,403,273.89	158.0		165,199.05	19-0	VIRGINIA								
WASHINGTON	174,624.05	2,045,600.00	94.9		474,962.60	79-8	687,862.12	116,642.49	9-7	1,994,600.00	82.8		77,000.00	16-7	WASHINGTON								
WEST VIRGINIA	96,821.02	2,446,368.32	178.7	12-0	60,382.60	4-6	44,032.28	13,636.41	12-4	2,372,865.30	178.2	12-0	549,055.62	79-3	WEST VIRGINIA								
WISCONSIN	2,491,353.68	4,243,708.88	396.2	14-6	1,556,727.22	200-8	16,606.53	50,664.71	9-3	4,084,440.62	377.4	9-2	219,650.26	22-4	WISCONSIN								
WYOMING	391,616.73	1,556,727.22	200.8	6E-3	5,567.00		426,380.42	471,486.00	95-3	1,604,283.53	195.8	66-3	59,000.69	5-2	WYOMING								
HAWAII	787,517.92	215,195.18	9.4				97,656.00	97,440.00	6-5	215,195.18	9.4				HAWAII								
TOTALS	\$ 42,873,608.63	\$ 155,689,430.91	14,766.4	1919-1	\$ 15,639,391.39	1894-0	\$ 38,889,023.58	\$ 31,034,865.49	3485-8	\$ 153,836,577.50	14,617.9	2027-6	\$ 17,451,244.80	1842-5	TOTALS								

* INCLUDES PROJECTS REPORTED COMPLETED (FINAL VOUCHERS NOT YET PAID) TOTALING: FEDERAL AID \$50,879,199.26; MILES ORIGINAL 4288.1; MILES STAGE 565.2

UNITED STATES DEPARTMENT OF AGRICULTURE
BUREAU OF PUBLIC ROADS

STATE HIGHWAY AND BRIDGE BOND STATUS, 1925
(SUBJECT TO REVISION)

8-6 (1925)
R. S. A.

STATES AUTHORIZING HIGHWAY BONDS	END FISCAL YEAR	DATES BONDS AUTHORIZED	AMOUNT OF BONDS, AS OF END OF FISCAL YEAR 1925		SOURCES FOR PAYMENTS ON HIGHWAY BONDS		REMARKS FUND USED AND BOARD APPOINTED	LAW REFERENCES AUTHORIZING BONDS
			AUTHORIZED	OUTSTANDING	FOR INTEREST	RETIREMENT OF PRINCIPAL		
ALABAMA	9/30	1921	\$25,000,000	\$ 18,665,000	MOTOR VEHICLE FEES	MOTOR VEHICLE FEES	SINKING FUND, BOND COMMISSION	CONST. AMENDED 1921, L. 1921, ACT. 49
CALIFORNIA	6/30	1909, '15, '19	73,000,000	69,050,000	STATE REVENUES, FROM TAXES, ETC.	STATE REVENUES, FROM TAXES, ETC.	STATE HWY. INTEREST & SINKING FUND	CONST. AMENDED 1919 (\$40,000,000)
COLORADO	11/30	1920, 1922	11,000,000	9,000,000	STATE TAX AND MOTOR VEHICLE FEES	STATE TAX AND MOTOR VEHICLE FEES	REDEMPTION FUND	1921, Ch. 139; 1923, Ch. 129
DELAWARE	12/31	1917	8,680,000	8,680,000	MOTOR VEHICLE FEES AND GAS. TAX	MOTOR VEHICLE FEES AND GAS. TAX		1917, Ch. F3; 1921, Ch. F4
IDAH0	12/31	1911-1922	3,623,500	(1) 3,787,000	STATE TAX (1913 ISSUE, M.V. FEES)	STATE TAX (1913 ISSUE, M.V. FEES)	REFUND BONDS IN 1925	1913, Ch. 183; 1917, Ch. 64; 1919, Ch. 40;
ILLINOIS	6/30	1918, 1924	160,000,000	84,000,000	M.V. FEES; TAX LEVY IF REQUIRED	M.V. FEES; TAX LEVY IF REQUIRED	ROAD FUND, M. V. LAW	1921, Ch. 109
LOUISIANA	12/31	1918, 1924	2,700,000	700,000	MOTOR VEHICLE FEES FROM 6 PARISHES AFFECTED BY SPECIAL HIGHWAY.	M. V. FEES FROM 6 PARISHES AFFECTED BY SPECIAL HIGHWAY.	ST. BO. OF LIQUIDATION OF DEBT	REVISED STATUTE 1923, CHAPTER 121
MAINE	6/30	1913-1923	16,447,000	10,442,500	MOTOR VEHICLE FEES	MOTOR VEHICLE FEES		1918, ACT 18; 1924, ACT 179
MARYLAND	9/30	1908-1924	35,157,000	33,732,000	STATE TAX	STATE TAX	HWY. & BRIDGE BOND SINKING FUND	1913, Ch. 130; 1919, C. 251; 1921, C. 131; 1923 C. 92; 1925, Ch. 203, 215.
MASSACHUSETTS	11/30	1894-1915	16,250,000	11,767,000	STATE REVENUES & M. V. FEES	STATE REVENUES & M. V. FEES		LAWS 1908, '10, '12, '14, '16, '18, '20, '22, '24
MICHIGAN	6/30	1919	50,000,000	(1) 53,419,000	STATE TAX & MOTOR VEHICLE FEES	STATE TAX & MOTOR VEHICLE FEES	HWY. IMPROVEMENT LOAN BOARD	LAWS 1904, 1904, 1916
MINNESOTA	3/30	1919, 1923	75,000,000	(3) 33,339,708	M. V. FEES; TAX LEVY IF REQUIRED	M. V. FEES; TAX LEVY IF REQUIRED	TRUNK HIGHWAY SINKING FUND	CONST. AMEND. 1919; L. 1919, ACT 25
MISSOURI	12/31	1920	60,000,000	40,000,000	" " " " " "	" " " " " "	ST. ROAD BOND INT. & SINK. FUND	CONST. AMEND. 1920; GEN. STAT. 1923
NEVADA	12/31	1919	1,000,000	900,000	MOTOR VEHICLE FEES	MOTOR VEHICLE FEES	CONSOL. BOND INT. & RED. FUND	CONST. AMENDED 1921; LAWS 1921
NEW HAMPSHIRE	6/30	1912	225,000	225,000	STATE HWY. FUND (BY STATE APPROP.)	STATE HWY. FUND (BY STATE APPROP.)		LAWS 1919
NEW JERSEY	6/30	1920, '22, '24	75,000,000	45,000,000	STATE TAX	STATE TAX	STATE REVENUES, INCL. M. V. FEES	L. 1911, Ch. 182 (ALL RETIRED IN 1925)
NEW MEXICO	6/30	1912, '21	2,500,000	2,500,000	STATE TAX	STATE TAX	SINKING FUND	1920, Ch. 352; 1922, Ch. 252; 1924, Ch. 262
NEW YORK	6/30	1906, '12	100,000,000	100,000,000	STATE REVENUES	STATE REVENUES	SINKING FUND, AFTER 1926	1912, Ch. F8; 1921, Ch. 167
NORTH CAROLINA	6/30	1921, '23	65,000,000	59,989,600	STATE HWY. FUND (INCL. M. V. & GAS TAX)	STATE HWY. FUND (INCL. M. V. & GAS TAX)	SINKING FUND	1906, 1912
OREGON	9/30	1917, '21	39,200,000	(1) 41,700,000	" " " " " "	" " " " " "		1921, Ch. 2; 1923, Ch. 263
PENNSYLVANIA	12/31	1915, 1925	100,000,000	85,367,000	STATE REVENUE (M. V. FEES AFTER 1925)	STATE REV. (M. V. FEES AFTER 1925)	BOARD OF FINANCE & REVENUE	1917, Ch. 175, 423; 1919, Ch. 173; 1921 Ch. 31, 43, 383
RHODE ISLAND	11/30	1906-1923	3,100,000	3,100,000	STATE REVENUES	STATE REVENUES		1919, ACT 50; 1925, ACT 16
SOUTH DAKOTA	6/30	1919, 1921	6,000,000	6,000,000	STATE TAX LEVY	STATE TAX LEVY		LAWS 1906, 1909, 1917, 1920, 1923
UTAH	11/30	1911-1921	7,250,000	7,280,000	STATE REV., M. V. FEES & GAS. TAX	STATE REV., M. V. FEES & GAS. TAX		1919, Ch. 334; AMEND. 1921, Ch. 395
WEST VIRGINIA	6/30	1920-1925	50,000,000	41,000,000	STATE TAX, M. V. FEES & GAS. TAX	STATE TAX, M. V. FEES & GAS. TAX	STATE ROAD SINKING FUND	1911, Ch. 45; 1917, C. 32; 1919, C. 59;
WYOMING	9/30	1919, 1921	4,600,000	4,600,000	STATE TAX	STATE TAX		1921, Ch. F4
TOTALS			991,742,500	779,518,308				CONST. AMEND. 1920; 1921, C. 113; 1923, Ch. 4; 1925, Ch. 13

NOTES: (1) INCLUDES REFUND BONDS (2) 1924 DATA USED (3) 1924 TOTAL OF COUNTY BONDS, ASSUMED BY STATE AS OBLIGATIONS.

BUREAU PREPARING AN EXHIBIT FOR THE AMERICAN ROAD BUILDERS ASSOCIATION CONVENTION

THE BUREAU IS PREPARING AN EDUCATIONAL EXHIBIT FOR DISPLAY AT THE COMING CONVENTION OF THE AMERICAN ROAD BUILDERS ASSOCIATION WHICH IS TO BE HELD IN CHICAGO FROM JANUARY 10 TO 14, 1927. THE MAIN DISPLAY OF THE BUREAU WILL OCCUPY A FLOOR SPACE OF APPROXIMATELY 2,500 SQUARE FEET AND WILL BE LOCATED IN THE BALL ROOM OF THE COLISEUM ON SOUTH WABASH AVENUE. ANOTHER SMALLER EXHIBIT, WHICH WILL CONSIST OF THREE STANDARD EXHIBIT BOOTHS, WILL BE LOCATED IN THE FOYER OF THE PALMER HOUSE - THE OFFICIAL CONVENTION HEADQUARTERS.

THE MAIN EXHIBIT PRESENTS A VIEW OF THE RESULTS OF EXPERIENCE AND RESEARCH IN HIGHWAY CONSTRUCTION, ACCUMULATED IN RECENT YEARS, ON WHICH THE NEW SCIENCE OF HIGHWAY ENGINEERING IS FOUNDED.

ENTERING THE EXHIBIT THE VISITOR FINDS HIMSELF IN THE OFFICE OF THE HIGHWAY COMMISSION OF THE STATE OF UTOPIA, TYPIFYING THE IDEAL HIGHWAY CONSTRUCTION AGENCY, THE OPERATIONS OF WHICH HAVE PRODUCED A SYSTEM OF UTOPIAN HIGHWAYS EVERY MILE OF WHICH IS IMPROVED TO THE COMPLETE SATISFACTION OF EVERY TAXPAYER.

THE COMMISSION'S OPERATIONS ARE CONDUCTED SOLELY ON THE BASIS OF RATIONAL PRINCIPLES DEVELOPED OUT OF THE EXPERIENCE OF THE PAST AND IN HARMONY WITH THE CONCLUSIONS OF RESEARCH, UNINFLUENCED BY CONSIDERATIONS OF POLITICS AND EXPEDIENCY.

AFTER A FURTHER EXPLANATION OF THE HAPPY SOLUTION OF THE HIGHWAY PROBLEM IN UTOPIA THE VISITOR WILL PASS INTO A LARGE ROOM AROUND THE WALLS OF WHICH ARE ARRANGED IN HORSESHOE FORM NINE EXHIBIT BOOTHS. THESE BOOTHS ILLUSTRATE THE SUCCESSIVE STEPS TAKEN BY THE UTOPIAN STATE HIGHWAY COMMISSION TO LOCATE, BUILD, MAINTAIN AND OPERATE A SUCCESSFUL SYSTEM OF STATE HIGHWAYS. THE BOOTHS ARE ENTITLED: TRAFFIC SURVEYS, HIGHWAY FINANCING, SUBGRADE SURVEYS, GRADING ECONOMY, STAGE CONSTRUCTION, CONSTRUCTION CERTAINTY, PAVEMENT PLANNING, EFFICIENT CONCRETE MIXING, AND TRAFFIC SERVICE.

FROM THE MAIN ROOM IN WHICH THE BOOTHS ARE LOCATED THE VISITOR PASSES INTO A DISCUSSION ROOM ON THE WALLS OF WHICH ARE HUNG BROMIDE ENLARGEMENTS OF THE SEVERAL BOOTHS. THERE, AN ATTENDANT WILL BE PRESENT TO ANSWER ANY QUESTIONS THAT MAY HAVE OCCURRED TO THE VISITOR AND TO PRESENT HIM WITH AN ILLUSTRATED

BOOKLET DESCRIB'NG THE SUBJECT MATTER OF THE ENTIRE EXHIBIT. COPIES OF THIS BOOKLET WILL BE FURNISHED TO DISTRICT ENGINEERS UPON REQUEST.

THE SMALLER EXHIBIT IN THE FOYER OF THE PALMER HOUSE WILL CONSIST OF THREE STANDARD BOOTHS TITLED: THE FEDERAL-AID HIGHWAY SYSTEM OF THE UNITED STATES, TAXATION WITHOUT REPRESENTATION, AND ROADS FROM SAVAGERY TO CIVILIZATION.

MODULUS OF RUPTURE BY CANTILEVER BEAM TESTS

CONTRIBUTED BY THE DIVISION OF TESTS

A SIMPLE DEVICE FOR TESTING CANTILEVER BEAMS IN ORDER TO DETERMINE THE MODULUS OF RUPTURE HAS GIVEN A GREAT IMPETUS DURING THE PAST YEAR TO THE FIELD TESTING OF CONCRETE. THERE IS NO DOUBT OF THE SAVING IN TIME AND EQUIPMENT MADE POSSIBLE BY THE USE OF CANTILEVER-BEAM SPECIMENS BOTH IN THE FIELD AND IN THE LABORATORY. BUT THE EFFECT UPON THE TEST RESULTS OF THE NUMEROUS AND NOVEL METHODS OF GRIPPING THE SPECIMEN AND APPLYING THE LOAD IS PRACTICALLY UNKNOWN.

WITH THE IDEA OF SUPPLYING INFORMATION RELATIVE TO THIS TEST, AN OUTLINE COVERING A VARIETY OF METHODS HAS BEEN DRAWN UP BY THE DIVISION OF TESTS. IN ACCORDANCE WITH THIS PROGRAM, SPECIMENS ARE TO BE COMPARED AS TO STRENGTH AND UNIFORMITY. FIVE OR MORE SPECIMENS WILL BE TESTED BY EACH METHOD. IT IS EXPECTED THAT FAIRLY CLOSE COMPARISONS MAY BE MADE AS TO THE SUITABILITY OF THE SEVERAL METHODS SINCE UNUSUAL PRECAUTIONS ARE BEING TAKEN TO INSURE A UNIFORM QUALITY IN THE CONCRETE BEAMS.

AT PRESENT A NUMBER OF THE SPECIMENS HAVE BEEN MADE UP AND SOME OF THEM HAVE BEEN TESTED. THE DATA SECURED UP TO THIS TIME ARE NOT SUFFICIENT TO GIVE AN INDICATION OF THE PROBABLE OUTCOME OF THE COMPLETED TESTS. AS THE STUDY PROGRESSES ADDITIONAL METHODS UNDOUBTEDLY WILL BE SUGGESTED AND INCLUDED IN THE INVESTIGATION.

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE HISTORY OF ARTS
CHICAGO, ILLINOIS

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE HISTORY OF ARTS
CHICAGO, ILLINOIS

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE HISTORY OF ARTS
CHICAGO, ILLINOIS

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE HISTORY OF ARTS
CHICAGO, ILLINOIS

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE HISTORY OF ARTS
CHICAGO, ILLINOIS

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE HISTORY OF ARTS
CHICAGO, ILLINOIS

THE UNIVERSITY OF CHICAGO
DEPARTMENT OF THE HISTORY OF ARTS
CHICAGO, ILLINOIS

MOTOR TRUCK IMPACT TESTS NOW IN PROGRESS

CONTRIBUTED BY JAMES A. BUCHANAN OF THE DIVISION OF TESTS.

A SPECIAL SERIES OF FIELD MOTOR-TRUCK IMPACT TESTS, NOW BEING CARRIED ON BY THE DIVISION OF TESTS, IS EXPECTED TO BE COMPLETED WITHIN A FEW MONTHS. THE OBJECTIVES OF THESE TESTS WERE DETERMINED FROM A STUDY OF THE DATA SECURED DURING THE ORIGINAL PROGRAM WHICH HAS BEEN COMPLETED. THE PRESENT WORK ALSO IS IN COOPERATION WITH THE SOCIETY OF AUTOMOTIVE ENGINEERS AND THE RUBBER ASSOCIATION OF AMERICA.

BASED UPON THE FINDINGS OF THE ORIGINAL PROGRAM, IT IS BELIEVED THAT MOTOR TRUCK IMPACT REACTIONS ARE DEPENDENT ON FOUR MAJOR VARIABLES, NAMELY; ROAD ROUGHNESS, TIRE EQUIPMENT, WHEEL LOAD AND VEHICLE SPEED. IT IS NOT BELIEVED THAT THE EFFECT OF ONE VARIABLE SHOULD BE CONSIDERED WITHOUT DUE REGARD FOR THE OTHER THREE. FROM THE ORIGINAL PROGRAM IT WAS POSSIBLE TO PLOT LINES OF EQUAL IMPACT REACTION FOR ONE ROAD CONDITION, FOUR TIRE TYPES, AND VARIOUS COMBINATIONS OF LOAD AND SPEED. THE RESULT WAS A SERIES OF ISODYNAMIC CURVES FROM WHICH COULD BE READ THE MAXIMUM TOTAL VERTICAL REACTIONS IN THOUSANDS OF POUNDS THAT MIGHT BE REASONABLY EXPECTED TO OCCUR ON THAT PARTICULAR ROAD FOR ANY COMBINATION OF WHEEL LOAD AND TRUCK SPEED. THE DATA WERE SEGREGATED BY TIRE TYPES SUCH AS PNEUMATIC, NEW CUSHION, NEW SOLID, AND WORN-OUT SOLID EQUIPMENT; AND THE CURVES REPRESENTED A RANGE OF WHEEL LOADS FROM 0 TO 20,000 POUNDS AND SPEED FROM 0 TO 30 MILES AN HOUR. THE TESTS WERE MADE ON THE ARLINGTON TEST ROAD WHICH HAD BEEN ROUGHENED BY ARTIFICIAL OBSTRUCTIONS.

WITH THIS PRELIMINARY ISOGRAM AS A BASIS, A PROGRAM OF TESTS WAS FORMULATED, THE FIELD WORK OF WHICH IS EXPECTED TO BE COMPLETED WITHIN A FEW MONTHS. A NUMBER OF HIGHWAY SECTIONS HAVE BEEN SELECTED AS REPRESENTATIVE IN TYPE AND ROUGHNESS. THESE SECTIONS WERE MARKED OFF IN ONE-TWENTIETH MILE LENGTHS AND POINTS WERE SPOTTED ON THE PAVEMENT WITH TRAFFIC WHITE TO GUIDE THE TRUCKS OVER THE TEST SECTIONS. THE ROAD SECTIONS WERE CALIBRATED CAREFULLY AT VARYING SPEEDS BY MEANS OF THE "ROUGHOMETER" DESCRIBED IN THE SEPTEMBER, 1926, NUMBER OF PUBLIC ROADS. THE ROUGHNESS LIMITS WERE APPROXIMATELY 100 AND 800 UNITS AT A SPEED OF 30 MILES AN HOUR.

TIRE EQUIPMENT WAS SELECTED TO REPRESENT THE FOUR TYPES USED IN THE PRELIMINARY INVESTIGATION, NAMELY; PNEUMATIC, NEW CUSHION, NEW SOLID, AND WORN-OUT SOLID. THE AVERAGE DEFLECTIONS OF THE FOUR TYPES UNDER A STATIC LOAD OF 10,000 POUNDS WERE APPROXIMATELY 2.5 INCHES, 1.0 INCH, 0.7 INCH, AND 0.2 INCH RESPECTIVELY. THE

THE HISTORY OF THE UNITED STATES

OF THE UNITED STATES OF AMERICA

THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE FIRST SETTLEMENTS TO THE PRESENT TIME. BY JAMES M. SMITH, ESQ. VOL. I. PART I. CHAP. I. THE DISCOVERY OF AMERICA.

THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE FIRST SETTLEMENTS TO THE PRESENT TIME. BY JAMES M. SMITH, ESQ. VOL. I. PART I. CHAP. II. THE DISCOVERY OF AMERICA.

THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE FIRST SETTLEMENTS TO THE PRESENT TIME. BY JAMES M. SMITH, ESQ. VOL. I. PART I. CHAP. III. THE DISCOVERY OF AMERICA.

THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE FIRST SETTLEMENTS TO THE PRESENT TIME. BY JAMES M. SMITH, ESQ. VOL. I. PART I. CHAP. IV. THE DISCOVERY OF AMERICA.

TIRES WERE MOUNTED PERMANENTLY ON EXTRA WHEELS IN ORDER THAT TIRE CHANGES MIGHT BE MADE RAPIDLY AND CONVENIENTLY BY SUBSTITUTING WHEELS.

AT THE BEGINNING OF THE TESTS, THE REAR-WHEEL LOADS WERE STANDARDIZED AT 2,500, 5,000, 7,500 AND 10,000 POUNDS. TWO TRUCKS WERE USED, A 2-TON TRUCK FOR THE 2,500 AND 5,000 POUND LOADS AND A 5-TON TRUCK FOR THE OTHER LOADS. THE LIGHT LOAD OF EACH TRUCK WAS ACCURATELY MEASURED ON PLATFORM SCALES AND SECURELY FASTENED IN POSITION. THEN THE HEAVIER LOAD WAS BUILT UP ON EACH TRUCK BY ADDING 100-POUND LEAD OR IRON WEIGHTS. THE POSITIONS OF THESE EXTRA WEIGHTS WERE MARKED ON THE TRUCKS SO THAT THE WHEEL LOADS MIGHT BE DUPLICATED READILY.

THE TRUCKS WERE OPERATED AT SPEEDS VARYING BY SMALL INCREMENTS FROM THE MINIMUM UP TO THE MAXIMUM SPEED OBTAINABLE. THE AVERAGE SPEED OF EACH RUN WAS COMPUTED FROM STOP-WATCH OBSERVATIONS AND THE KNOWN LENGTH OF THE TEST SECTION. VARIATIONS IN SPEED WERE OBSERVED FROM SPEEDOMETERS MOUNTED ON THE TRUCKS. RUNS VARYING FROM THE AVERAGE SPEED BY MORE THAN 1/2 MILE PER HOUR AS REGISTERED IN THE SPEEDOMETER WERE DISCARDED.

A FIELD TEST PROGRAM OF THIS CHARACTER MADE NECESSARY A MOBILE ORGANIZATION AND EQUIPMENT. TO PROVIDE FOR THIS, A FIELD OFFICE AND TWO LOADING AND STORAGE PLATFORMS WERE BUILT ON A 16-FOOT, THREE-TON-TRAILER CHASSIS. ON A 2-TON TRUCK CHASSIS, A SPECIAL PLATFORM BODY WAS CONSTRUCTED WITH A SWINGING CHAIN HOIST PLACED AT THE FORWARD END. IN ADDITION TO HAULING THE TRAILER, THIS SERVICE TRUCK WAS USED TO CARRY THE SPARE WHEELS, GASOLINE, AND GENERAL EQUIPMENT NECESSARY FOR THE TESTS.

THE 2-TON AND 5-TON TEST TRUCKS WERE EQUIPPED WITH THE COIL-SPRING ACCELEROMETERS DEVELOPED BY THE BUREAU, WHICH WERE MOUNTED SO AS TO FOLLOW THE VERTICAL MOTION OF THE RIGHT REAR WHEELS. IN FIGURE 1 THE FOUR PIECES OF ROLLING STOCK JUST DESCRIBED ARE SHOWN PARKED ON A VACANT LOT NEAR ONE GROUP OF THE TEST SECTIONS. THE TWO MOTORCYCLES WERE USED BY LOCAL TRAFFIC OFFICERS.

MUNICIPAL AUTHORITIES IN THE DISTRICT OF COLUMBIA AND IN ALEXANDRIA, VIRGINIA, WERE INTERESTED COOPERATORS IN THE TESTS MADE WITHIN THEIR JURISDICTION. TRAFFIC OFFICERS WERE ASSIGNED TO ASSIST IN THE WORK AND THEY WERE EXTREMELY VALUABLE IN MAKING IT POSSIBLE TO CONDUCT THE TESTS ON THE STREETS WITH SAFETY. NO-PARKING SIGNS WERE PLACED TEMPORARILY AT SEVERAL POINTS TO FACILITATE THE TESTS.

THE FIRST PART OF THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE DISCOVERY OF THE COUNTRY TO THE PRESENT TIME.

IN TWO VOLUMES. VOL. I. FROM THE DISCOVERY OF THE COUNTRY TO THE PRESENT TIME. BY JAMES OSGOOD, ESQ. OF THE BARR, AT LINCOLN'S INN. LONDON: PUBLISHED BY J. JOHNSON, ST. PAUL'S CHURCH-YARD, 175. 1825.

THE SECOND PART OF THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE DISCOVERY OF THE COUNTRY TO THE PRESENT TIME. BY JAMES OSGOOD, ESQ. OF THE BARR, AT LINCOLN'S INN. LONDON: PUBLISHED BY J. JOHNSON, ST. PAUL'S CHURCH-YARD, 175. 1825.

THE THIRD PART OF THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE DISCOVERY OF THE COUNTRY TO THE PRESENT TIME. BY JAMES OSGOOD, ESQ. OF THE BARR, AT LINCOLN'S INN. LONDON: PUBLISHED BY J. JOHNSON, ST. PAUL'S CHURCH-YARD, 175. 1825.

THE FOURTH PART OF THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE DISCOVERY OF THE COUNTRY TO THE PRESENT TIME. BY JAMES OSGOOD, ESQ. OF THE BARR, AT LINCOLN'S INN. LONDON: PUBLISHED BY J. JOHNSON, ST. PAUL'S CHURCH-YARD, 175. 1825.

THE FIFTH PART OF THE HISTORY OF THE UNITED STATES OF AMERICA, FROM THE DISCOVERY OF THE COUNTRY TO THE PRESENT TIME. BY JAMES OSGOOD, ESQ. OF THE BARR, AT LINCOLN'S INN. LONDON: PUBLISHED BY J. JOHNSON, ST. PAUL'S CHURCH-YARD, 175. 1825.



FIGURE 1. - THE EQUIPMENT USED IN THE SPECIAL IMPACT TESTS OF THE BUREAU. ON THE LEFT ARE THE 2 AND 5-TON TEST TRUCKS. IN THE CENTER IS THE TRAILER EQUIPPED WITH A FIELD OFFICE AND TWO MOTORCYCLES. ON THE RIGHT IS THE SERVICE TRUCK ON WHICH IS MOUNTED A CHAIN HOIST FOR CHANGING TIRES. THE MOTORCYCLES WERE USED BY LOCAL TRAFFIC OFFICERS.

